Muon Collaboration

High-power Targets

LINAC 2004

Lűbeck, Germany

August 19, 2004

Harold G. Kirk
Brookhaven National Laboratory

Intense Secondary Beams

New physics opportunities are generating world wide interest in the development of new intense secondary beam.

- Neutron Sources
  - European Spallation Source
  - US Spallation Neutron Source
  - Japanese Neutron Source
- Kaons
  - RSVP at BNL
  - CKM at FNAL
- Muons
  - MECO and g-2 at BNL
  - SINDRUM at PSI
  - EDM at JPARC
  - Muon Collider
- Neutrinos
  - Superbeams
  - Neutrino Factories

Multi-MW New Proton Machines

SNS at 1.2 MW → 2.0 MW

JPARC 0.7 MW → 4.0 MW

FNAL 0.4 MW → 1.2 MW → 2.0 MW

BNL 0.14 MW → 1.0 MW → 4.0 MW

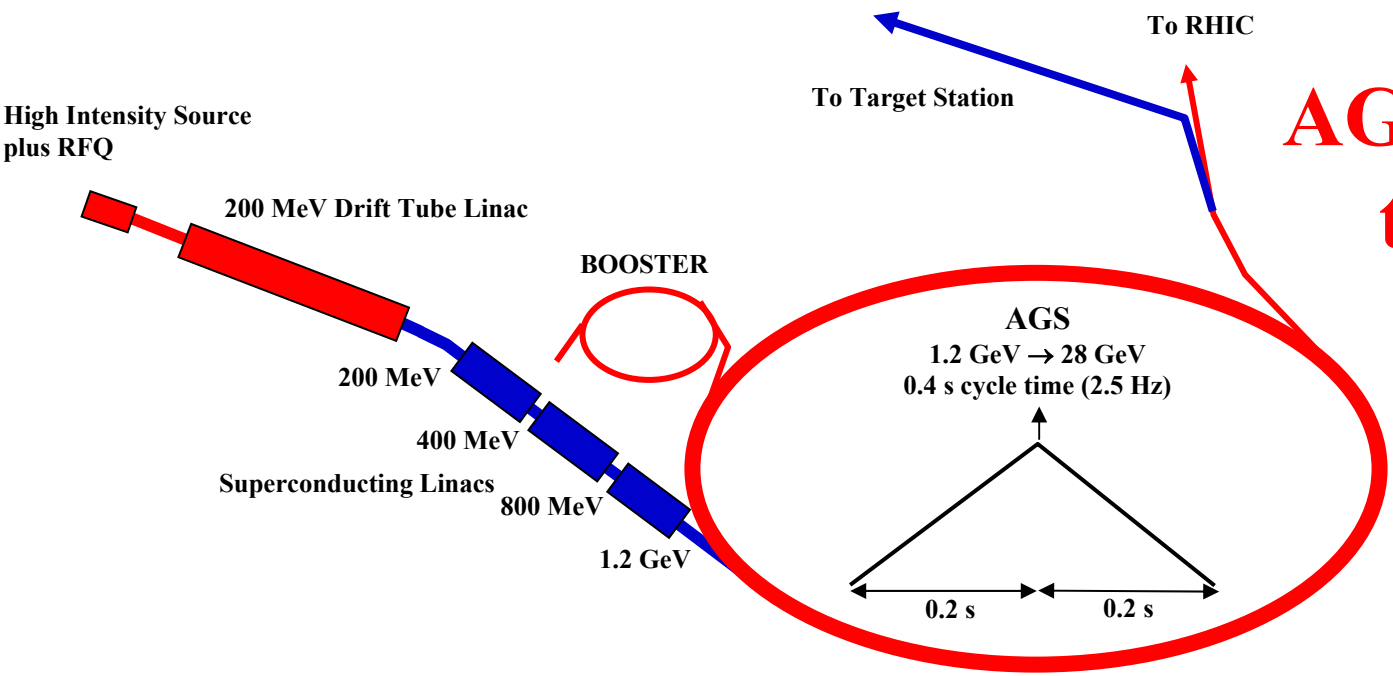

AGS Upgrade to 1 MW

High-power Targetry Workshop
Ronkonkoma, Long Island Sept. 2003

Over 40 attendees from:

Argonne
Brookhaven
CERN
Fermilab
FZ-Julich
KEK
Los Alamos
Michigan State
Oak Ridge
Princeton
PSI-Zurich
Rutherford Lab
SLAC

Facilities Represented

AGS
ESS
EURISOL
IFMIF
ISIS
JPARC
LANCE
Neutrino Factory
NUMI
NLC
RIA
SINQ
SNS

High-power Targetry Challenges

High-average power and high-peak power issues

- Thermal management
  - Target melting
  - Target vaporization
- Radiation
  - Radiation protection
  - Radioactivity inventory
  - Remote handling
- Thermal shock
  - Beam-induced pressure waves
- Material properties

Thermal Management

T1 target at JPARC

Kaon Production

Rotating Ni Disks
Water Cooled
590 J/g

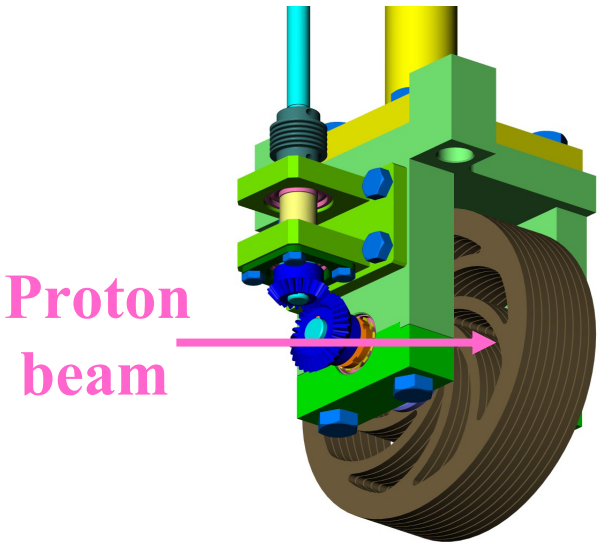

Neutron Spallation Target at LANL
Lance p beam 0.8 GeV 0.8 MW
Stainless Steel Claded Tungsten
Water Cooled 100 W/g

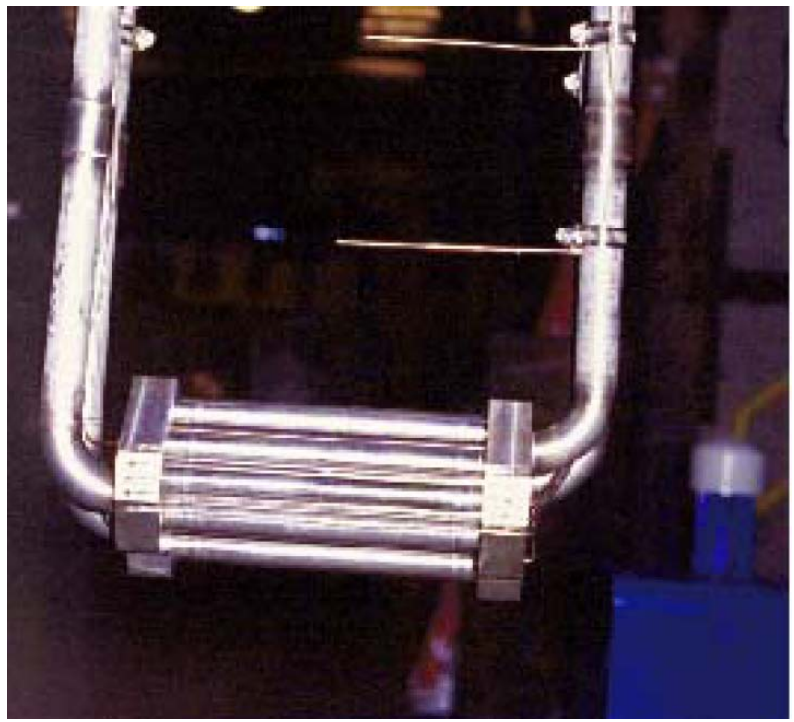

Neutrino Horns

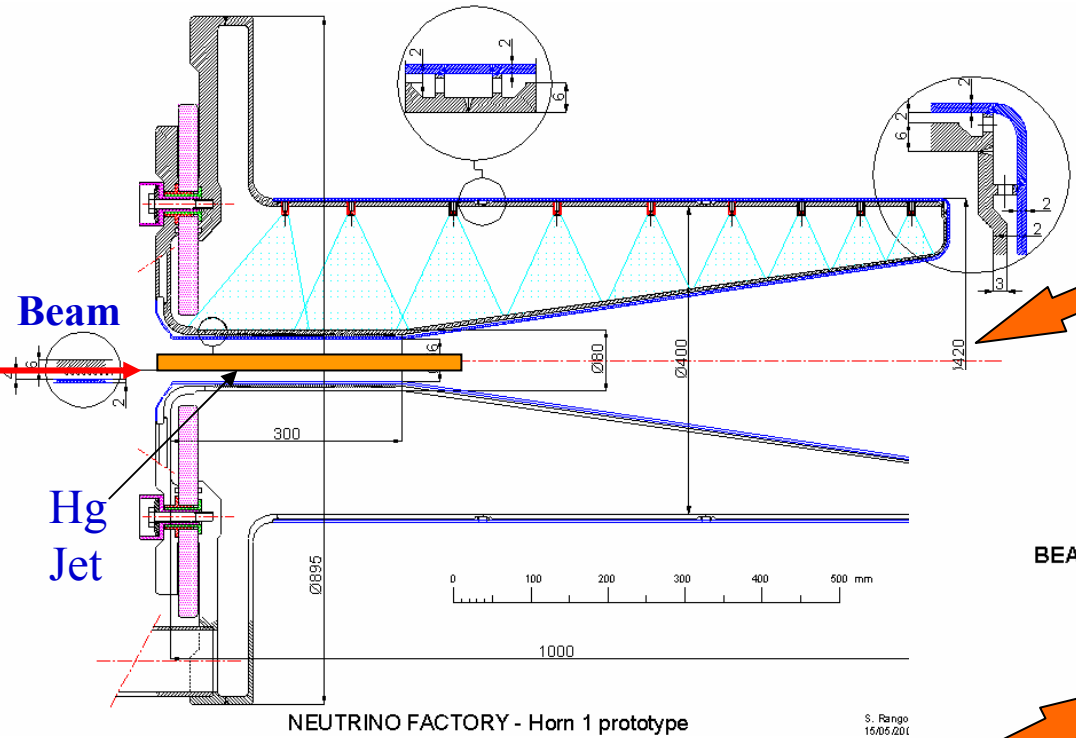

CERN 2.2 GeV 4MW
SPL Proton Beam
on an Hg target

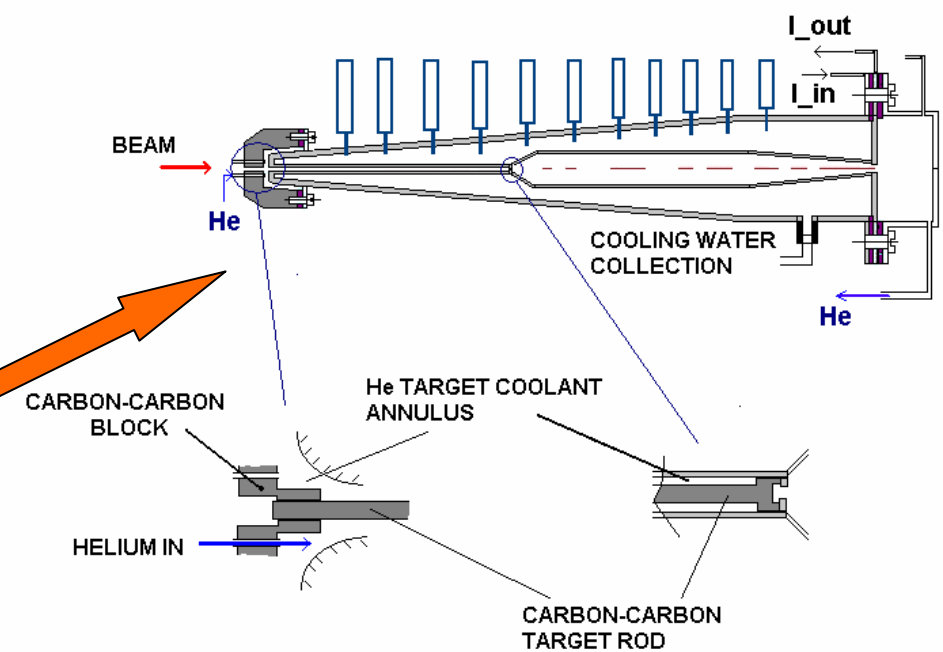

BNL 28 GeV 1MW
Proton Beam on a
Carbon-Carbon target

Prototype of T2K Neutrino Target

Prototype design for He cooling pipe is in progress.

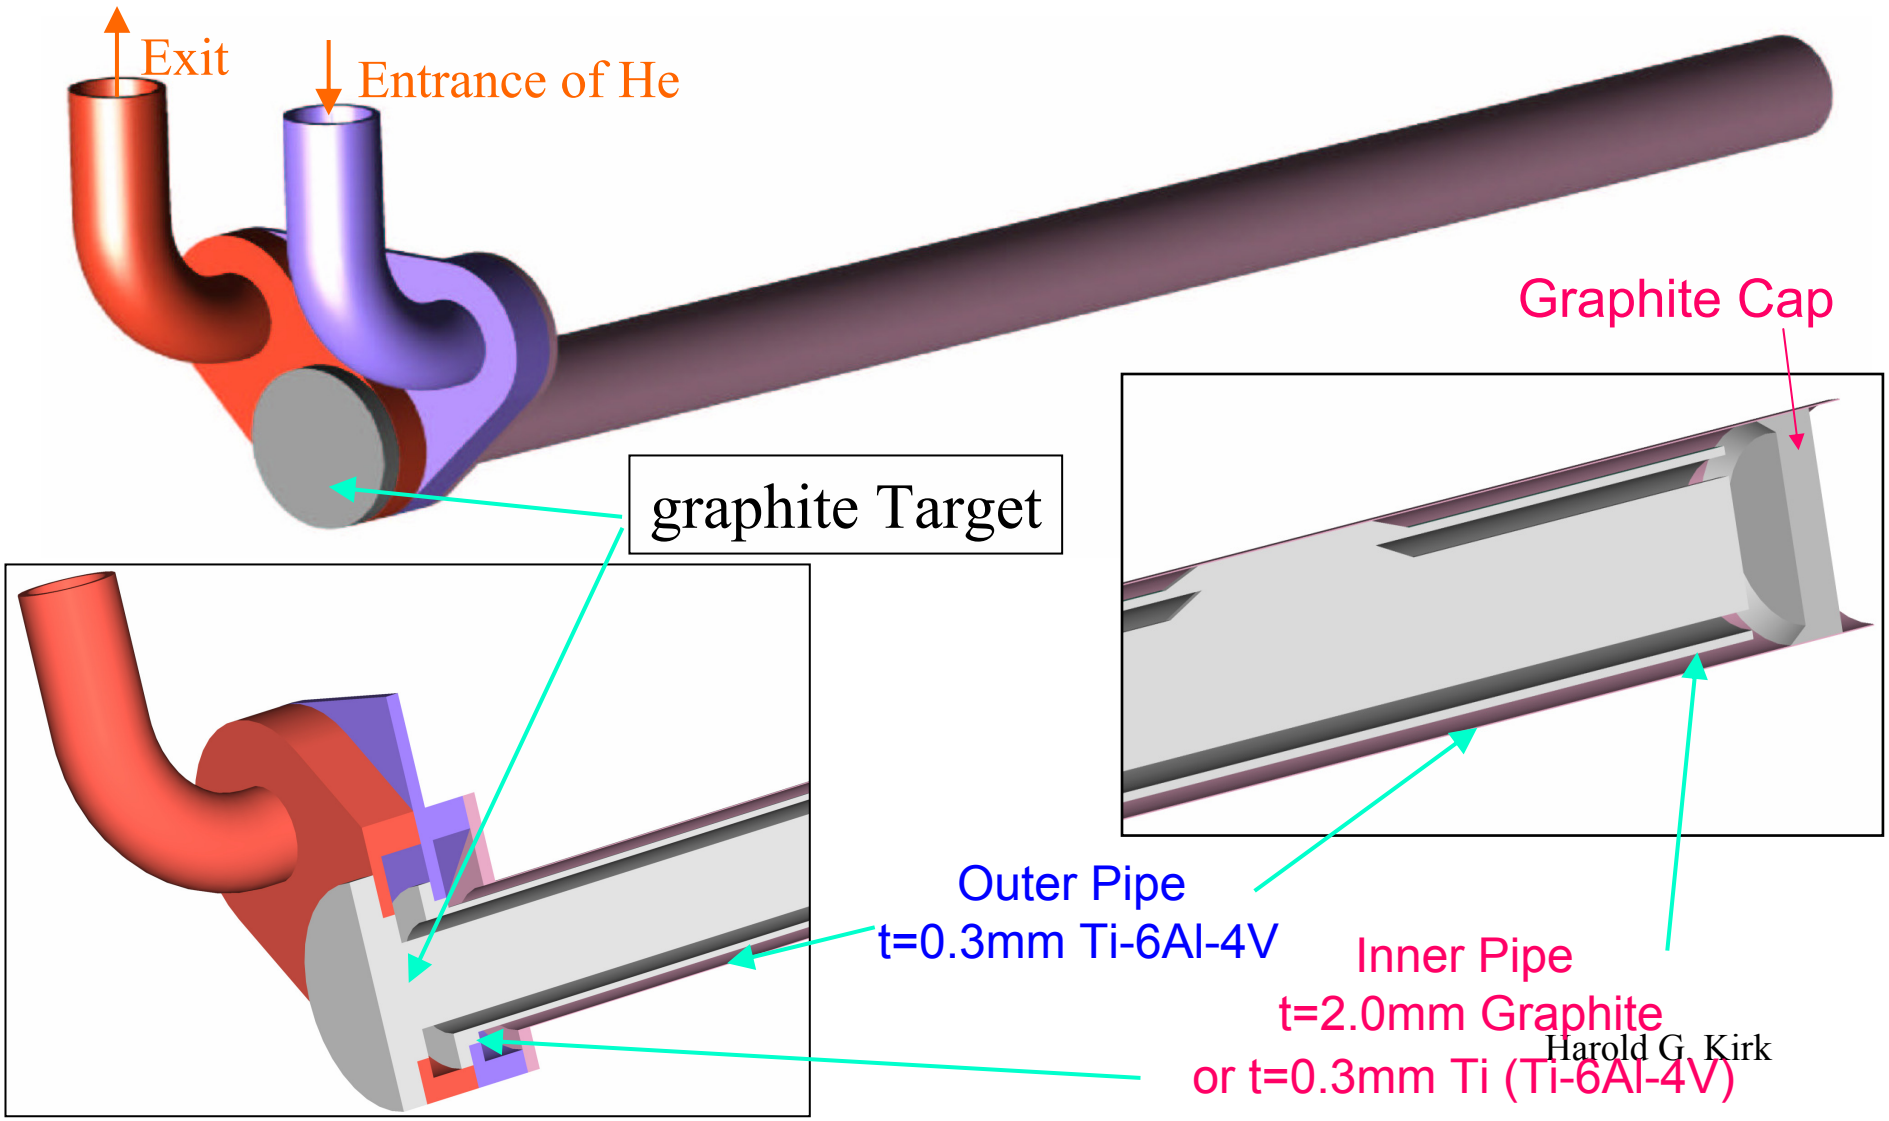

Harold G. Kirk

CERN ISOLDE Solid Targets

BEFORE

AFTER

PS-Booster 1-1.4 GeV 0.005 MW

Various targets/materials

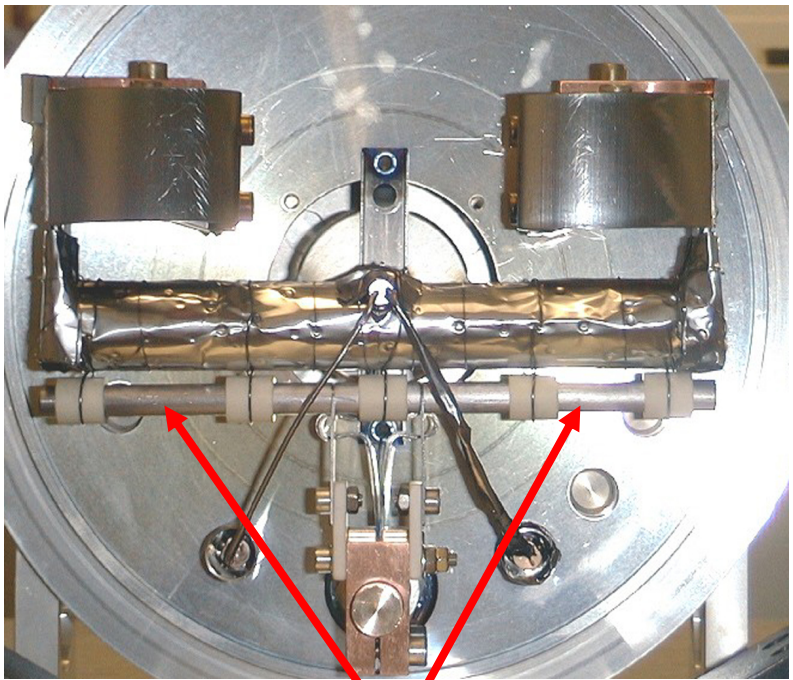

Tantalum Target

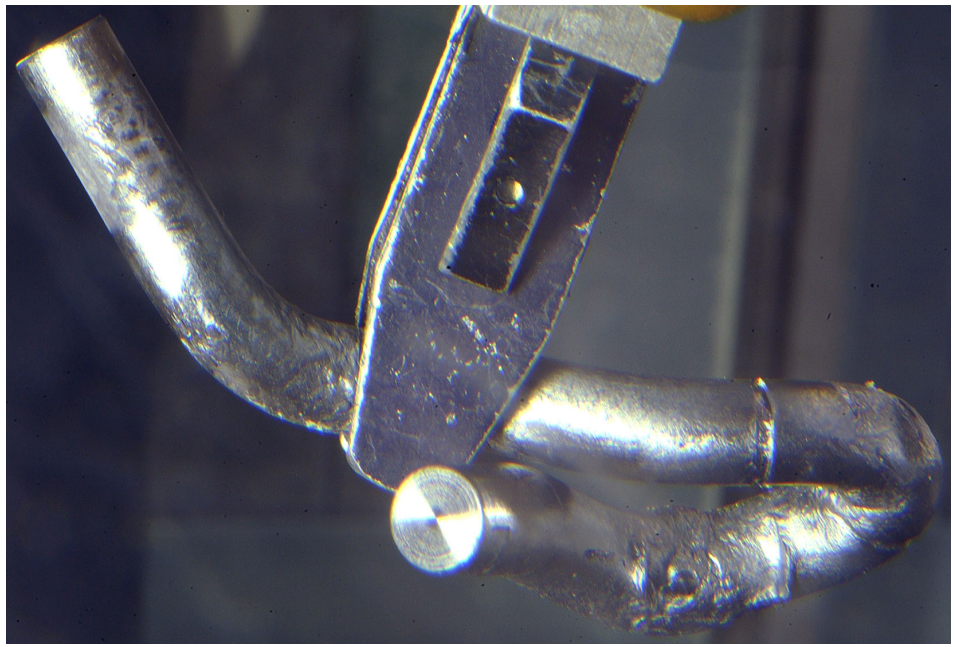

A Rotating Solid Target

Schematic of a rotating tantalum target

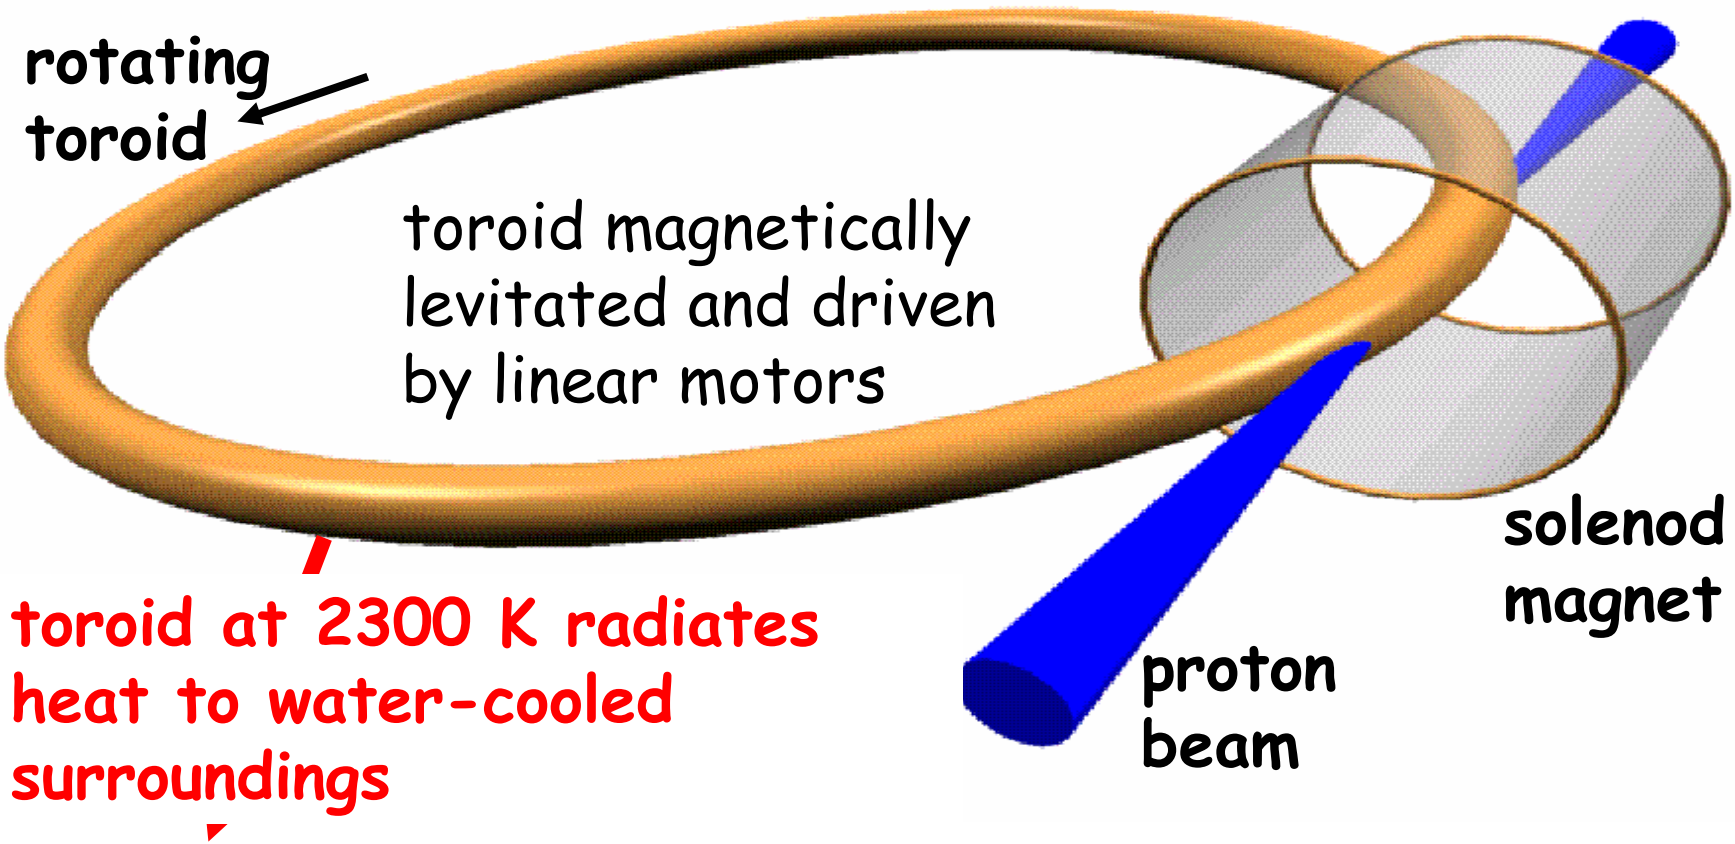

Roger Bennett, RAL

Granular Solid Target

Advantages for a granular approach

- Reduced sample volume results in reduced sample thermal gradient
- Large surface/volume ratio leads to better heat removal
- Better liquid or gas conduction through the target
- Simpler stationary solid target approach
- Could utilize high-Z target material

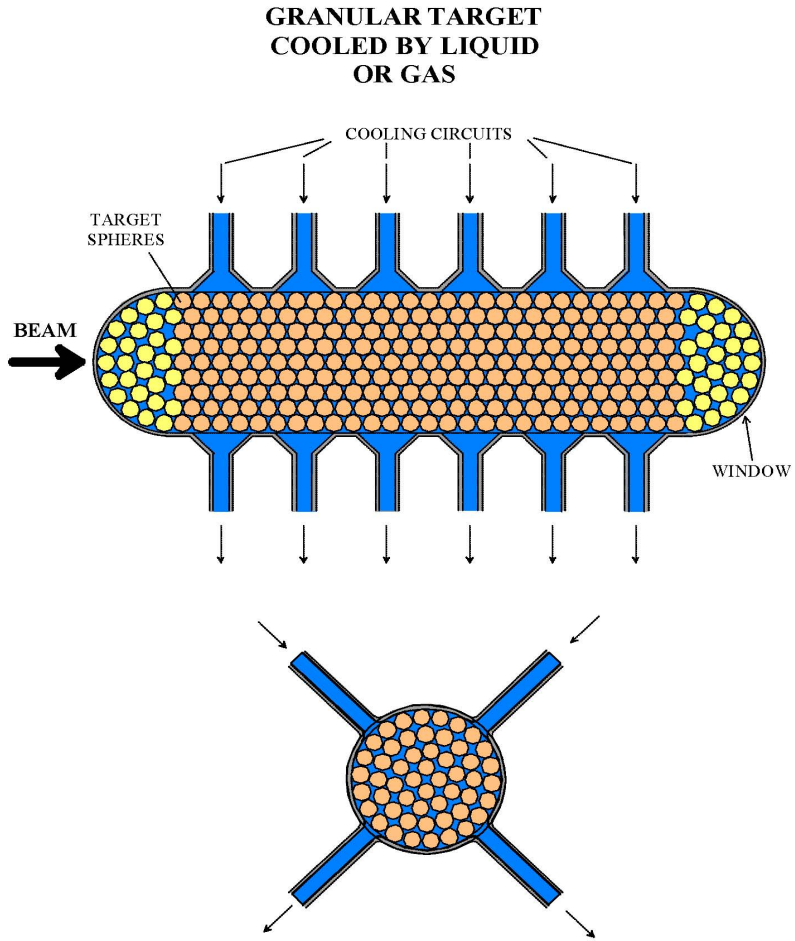

Peter Sievers, CERN

Liquid Metal Targets—PbBi Eutectic

MEGAPIE Project at PSI

0.59 GeV proton beam

1 MW beam power

Goals:

- Demonstrate feasablility
- One year service life
- Irradiation in 2005

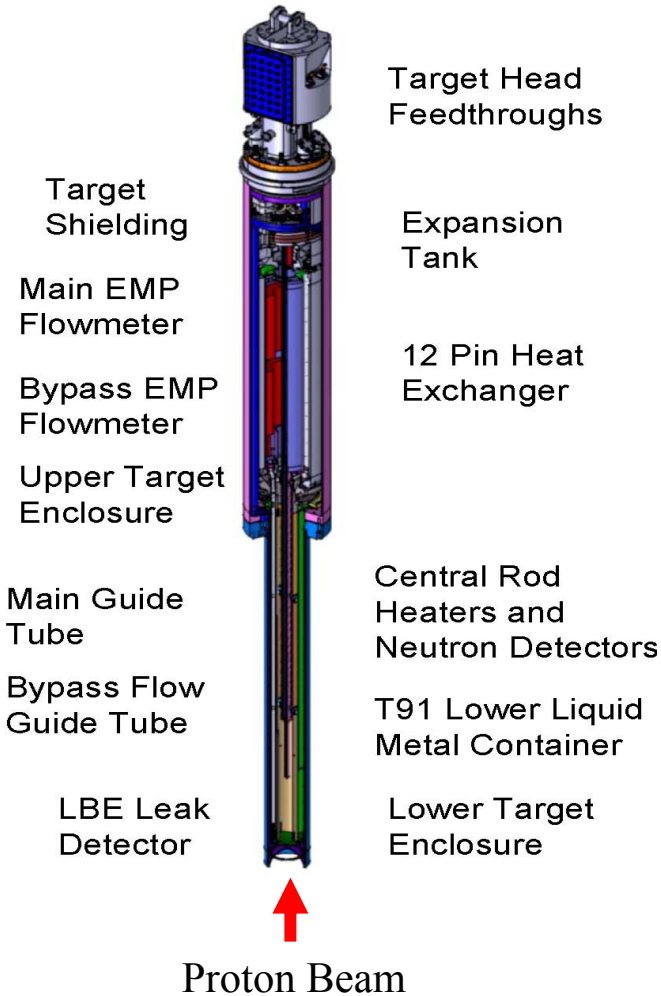

The SNS Mercury Target

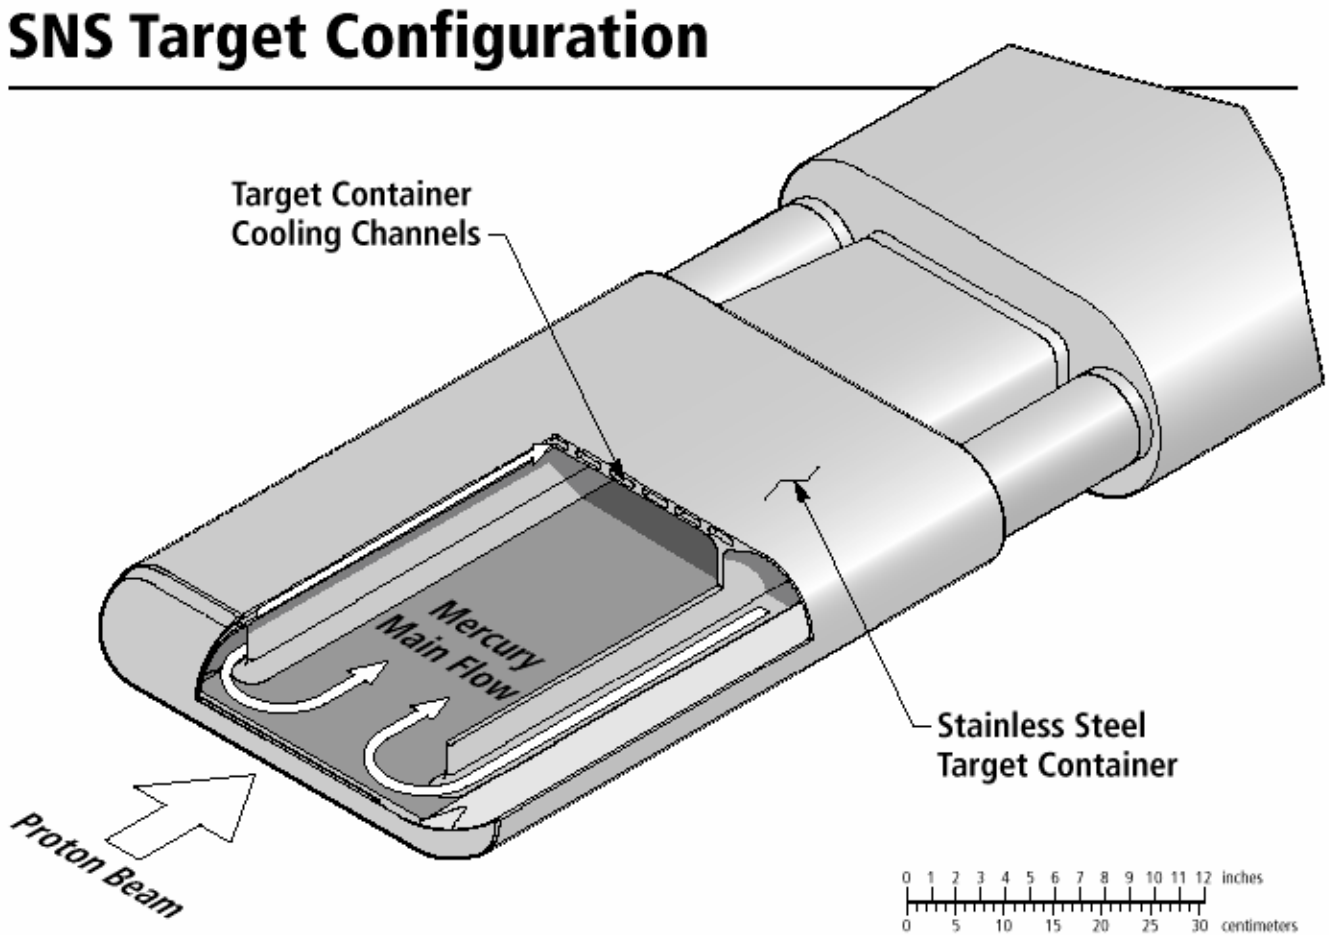

Target Region Within Core Vessel

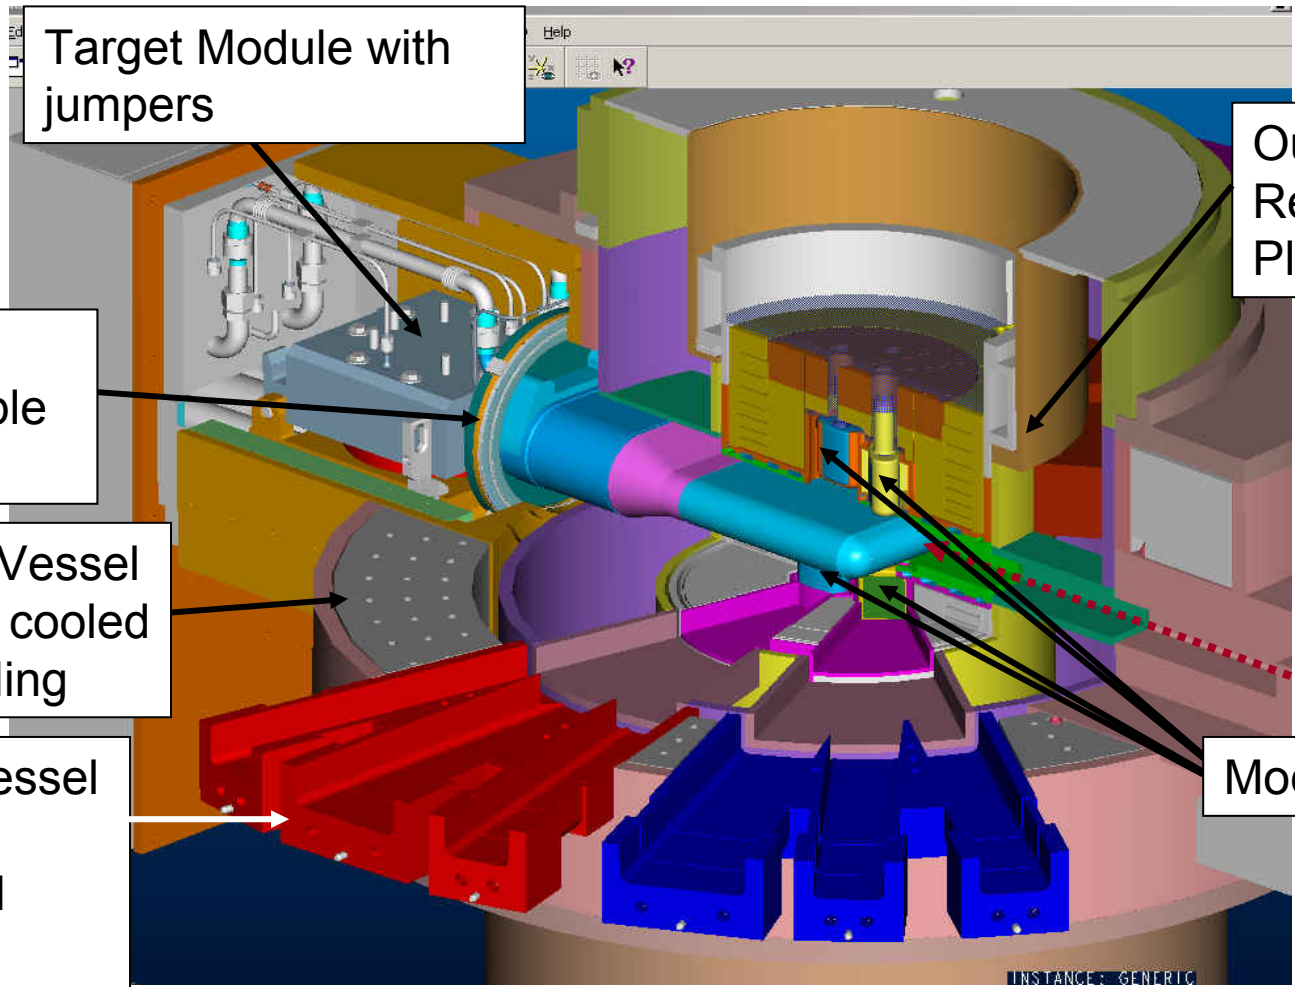

Target Module with jumpers

Outer Reflector Plug

Target Inflatable seal

Core Vessel water cooled shielding

Core Vessel Multi-channel neutron guide flange

Moderators

The Target Pitting Issue

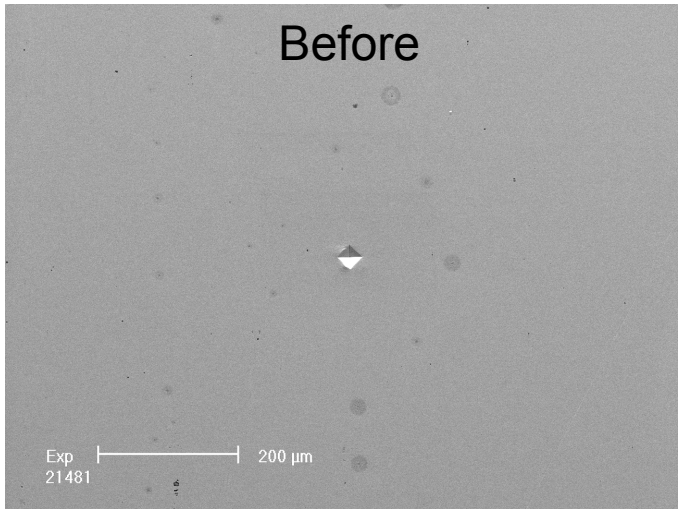

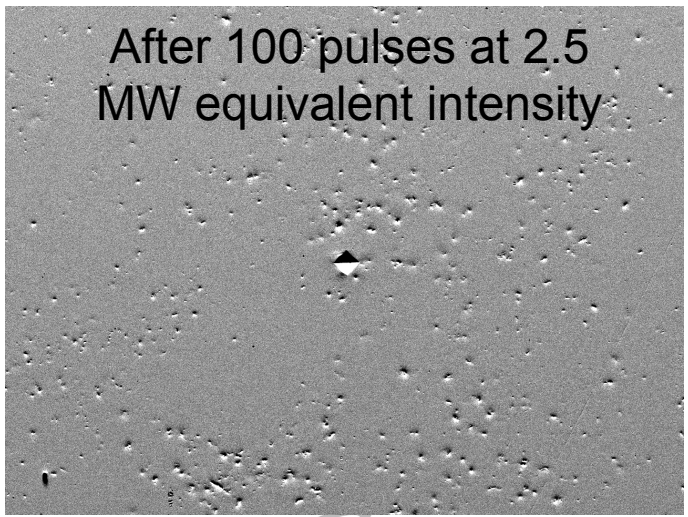

Feature	Normalized Erosion*
Gas layer near surface	0.06
Bubble Injection	0.25
Kolsterized surface	0.0008
1/2 Reference Power	0.09

* Erosion relative to reference (2.5 MW) case

ESS team has been pursuing the Bubble injection solution.
SNS team has focused on Kolsterizing (nitriding) of the surface solution.
SNS team feels that the Kolsterized surface mitigates the pitting to a level to make it marginally acceptable.
Further R&D is being pursued.

Radiation Management
The JPARC Kaon Target

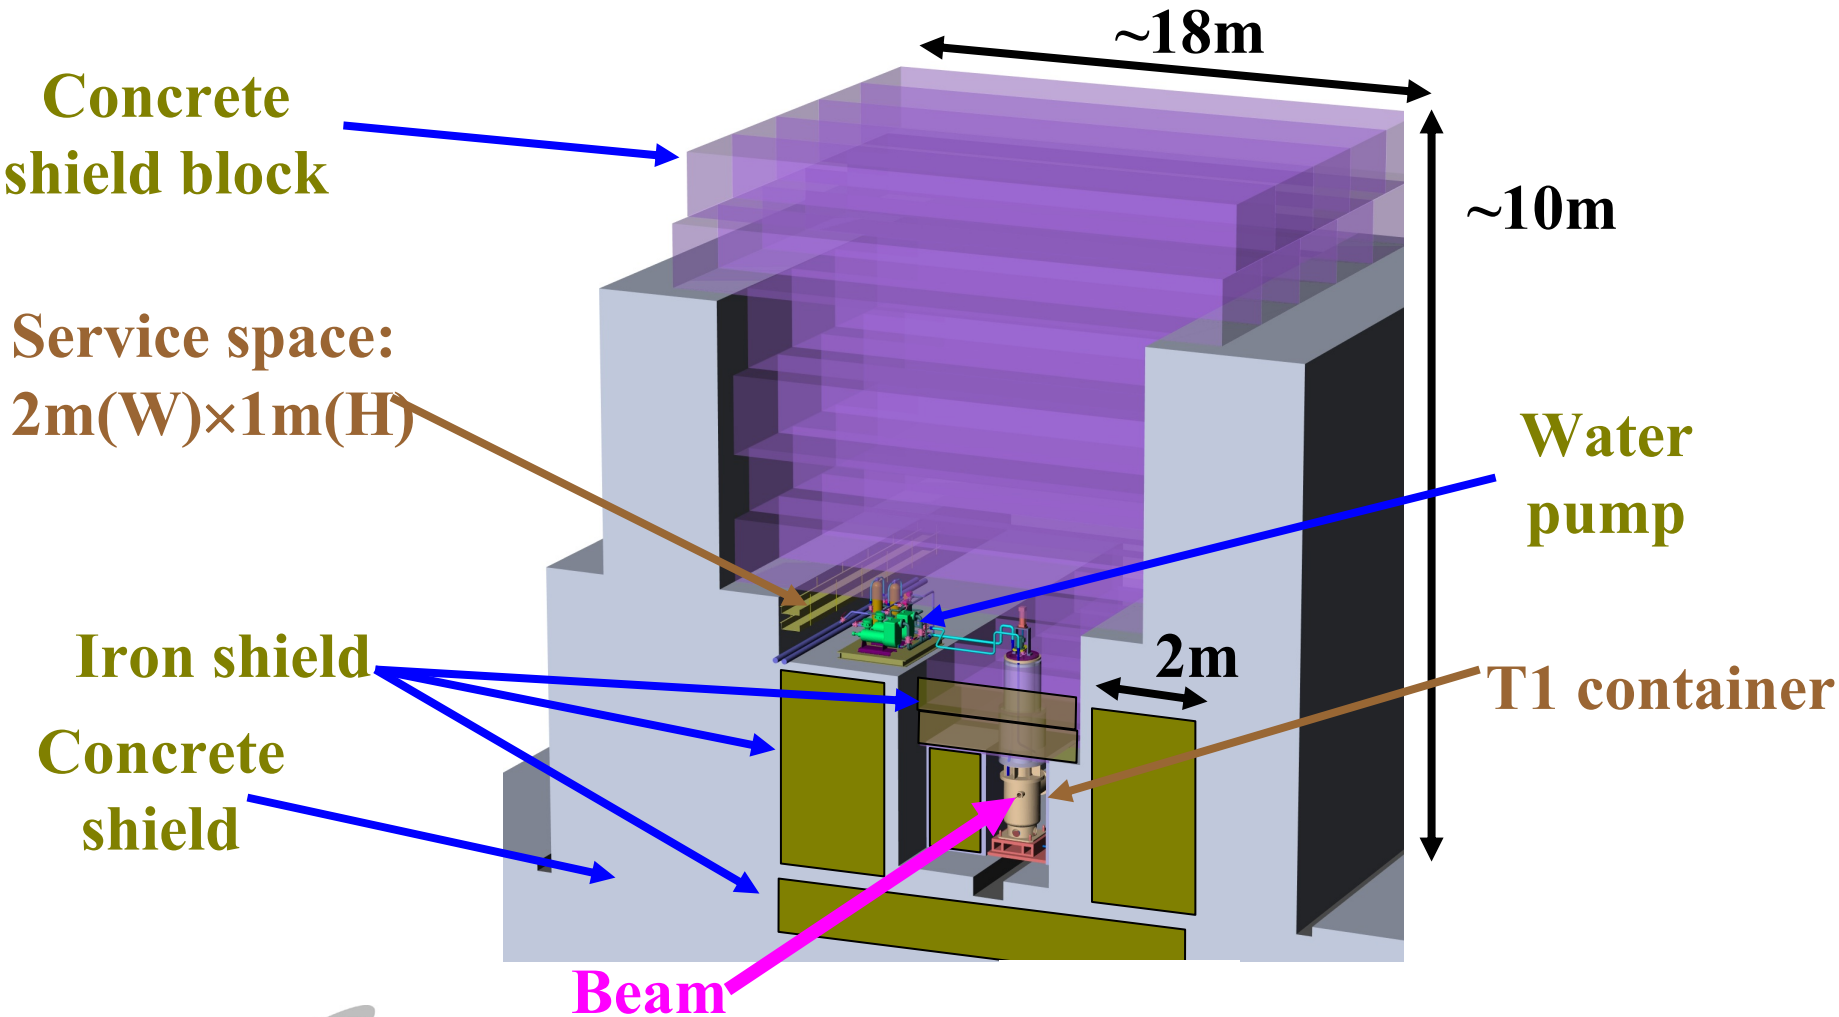

The Neutrino Factory Target

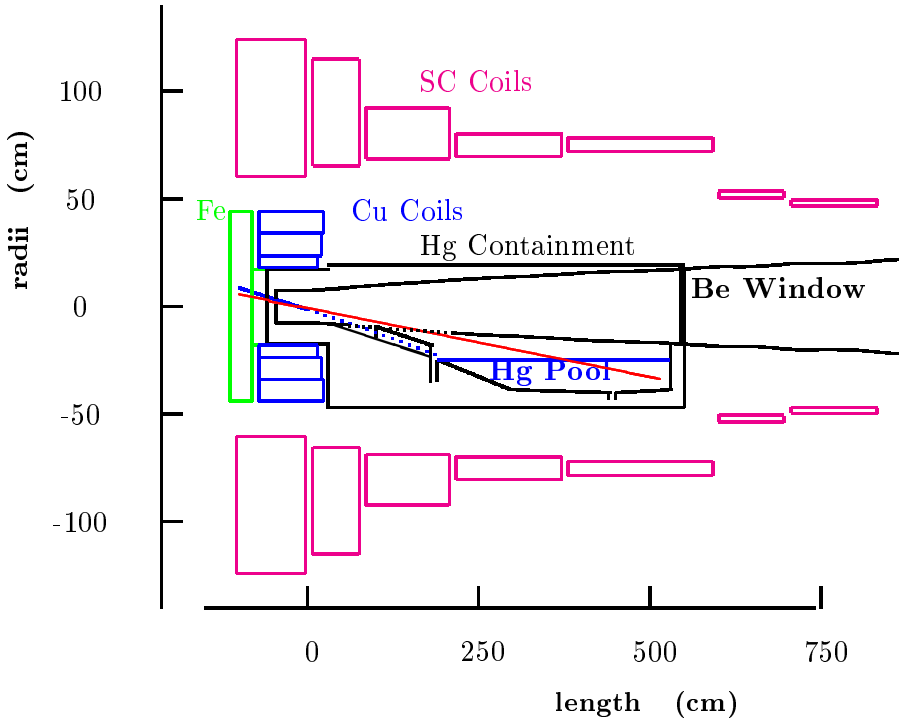

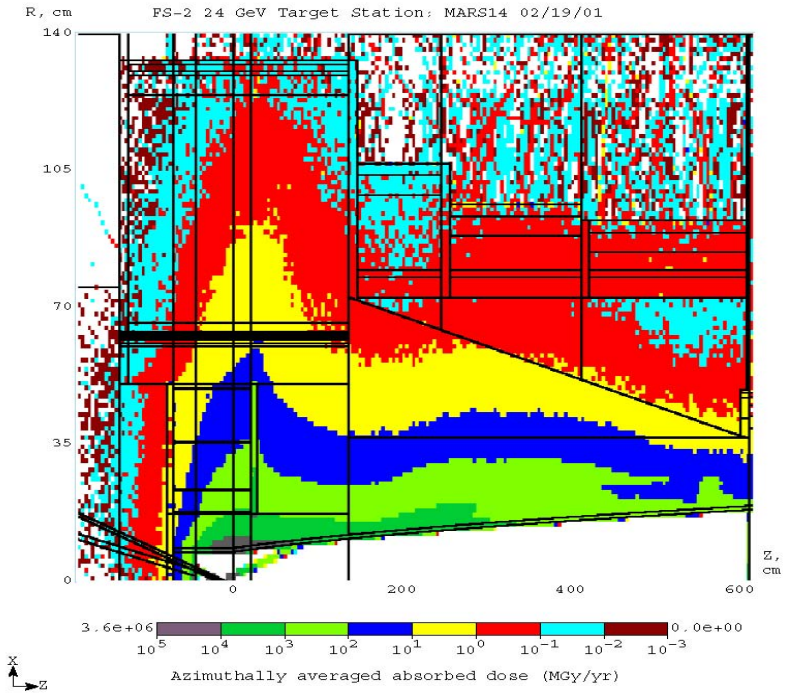

Component Lifetime

Component	Radius (cm)	Dose/yr (Grays/2 x 10^7 s)	Max allowed Dose (Grays)	1 MW Life (years)	4 MW life (years)
Inner shielding	7.5	5×10^{10}	10^{12}	20	5
Hg containment	18	10^9	10^{11}	50	12
Hollow conductor coil	18	10^9	10^{11}	100	25
Superconducting coil	65	6×10^6	10^8	16	4

High-peak Power Issues

When the energy deposition time frame is on the order off or less than the energy deposition dimensions divided by the speed of sound then pressure waves generation can be an important issue.

Time frame = beam spot size/speed of sound

Illustration

Time frame = 1cm / 5×10^3 m/s = 2 μs

CERN ISOLDE Hg Target Tests

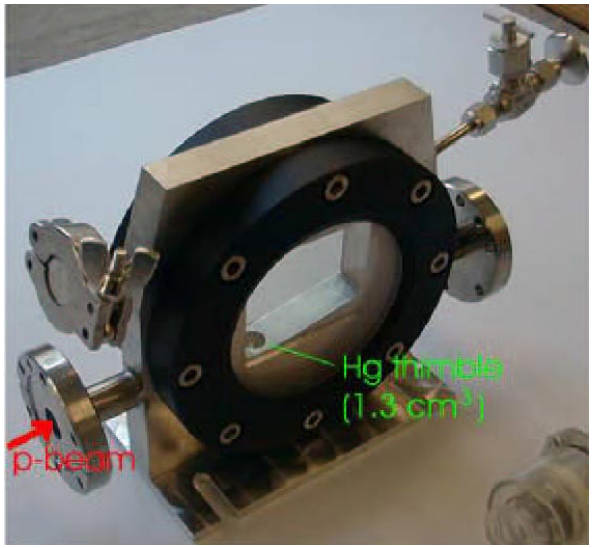

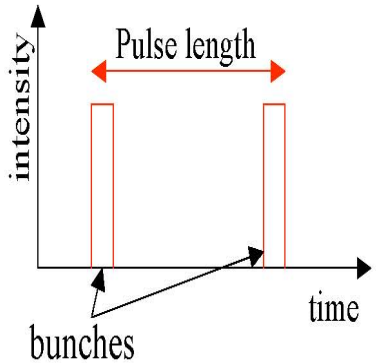

Pulse length

Proton beam
5.5 TP per
Bunch.

Velocities (pulse length)

BROOKHAVEN NATIONAL LABORATORY

Harold G. Kirk

Pressure Wave Amplitude

$$\text{Stress} = Y\,\alpha_T\,U / C_V$$

Where Y = Material modulus

α_T = Coefficient of Thermal Expansion

U = Energy deposition

C_V = Material heat capacity

When the pressure wave amplitude exceeds material tensile strength then target rupture can occur. This limit is material dependant.

E951: Graphite & Carbon-Carbon Targets

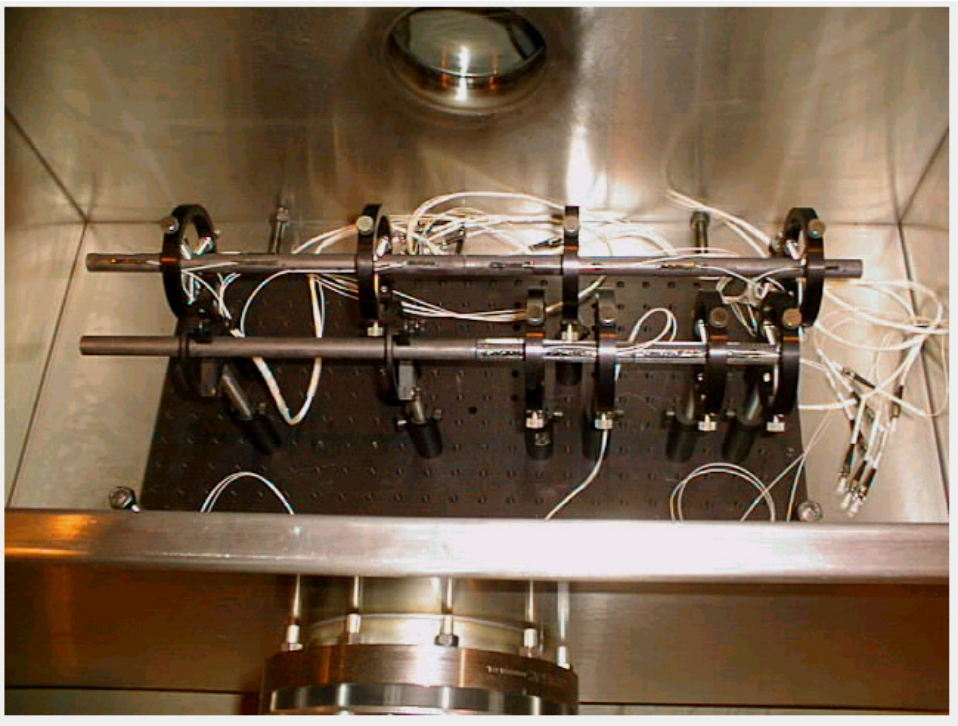

Key Material Properties

	ATJ	CC X/U
Y, GPa	10	54/5.3
α_T , $10^{-6}/^0K$	2.5	~0
Tensile Strength, MPa	15	182/44

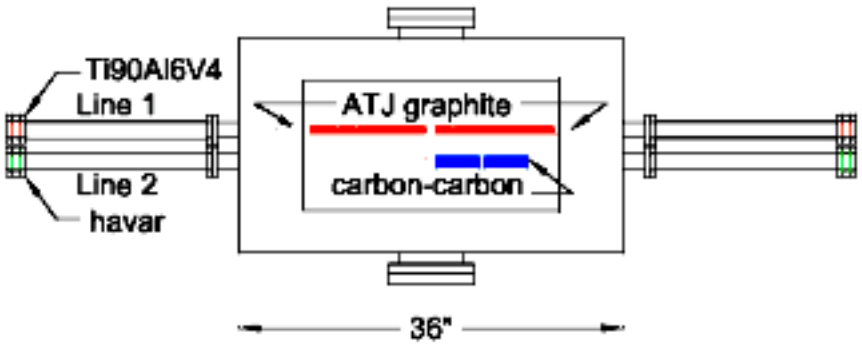

Harold G. Kirk

E951: Strain Gauge Measurements

24 GeV, 3 x 10^{12} protons/pulse

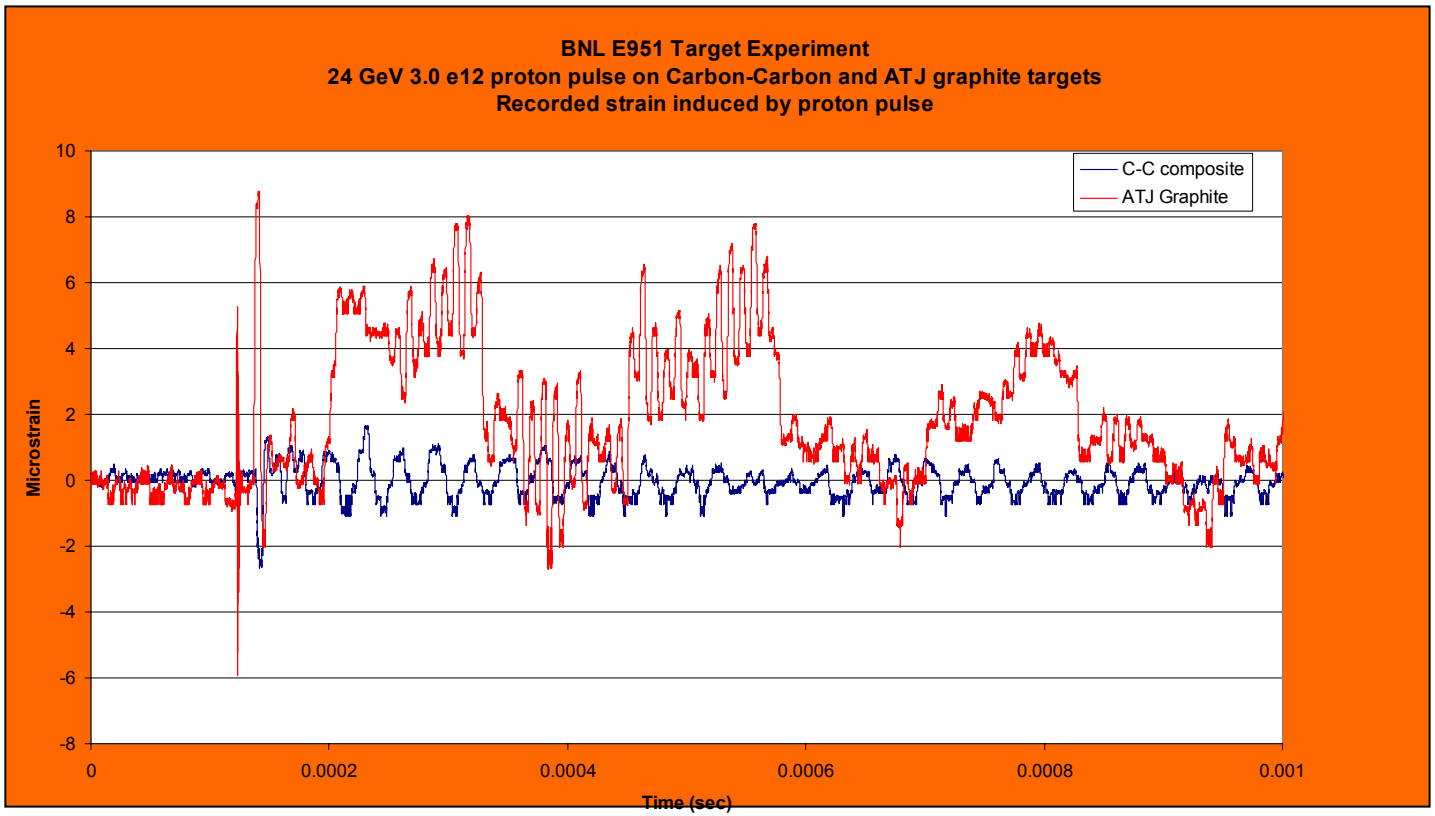

Laser-vibrometer studies of surface-movement at CERN

Muon Collaboration

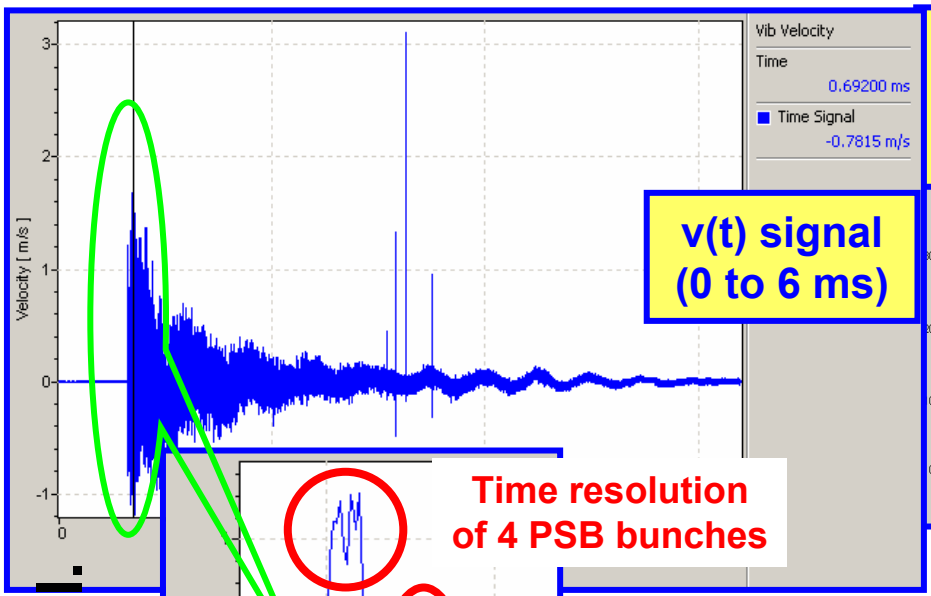

v(t) signal (0 to 6 ms)

Ta cylinder (l = 100 mm, d = 10 mm), proton beam 2 mm horizontally off-axis, 4 bunches, 32 TP

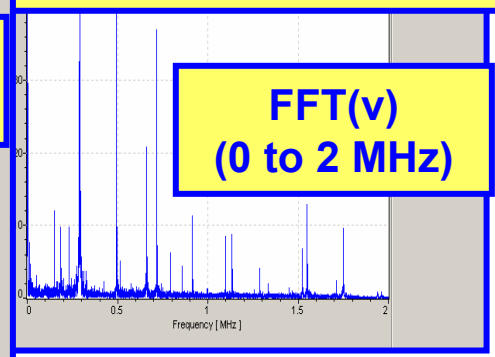

FFT(v) (0 to 2 MHz)

Pb cylinder (l = 100 mm, d = 10 mm), proton beam 2 mm horizontally off-axis, 1 bunch, 8 TP

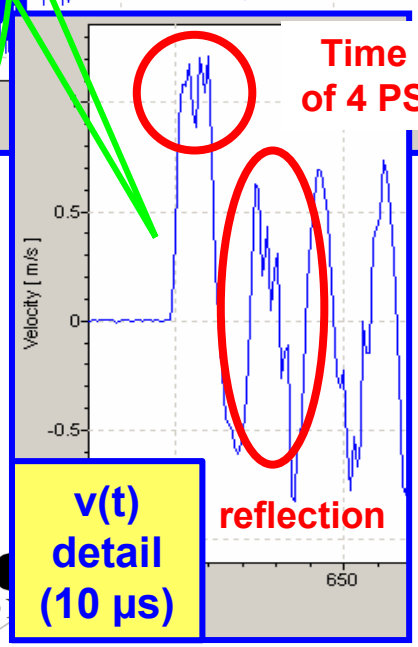

Time resolution of 4 PSB bunches

reflection

v(t) detail (10 µs)

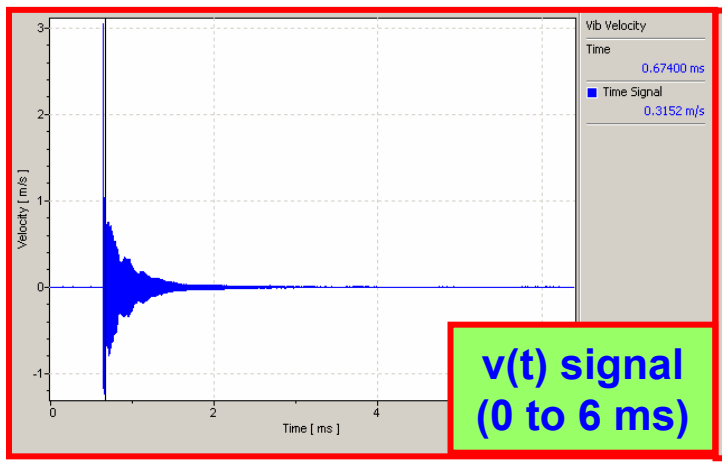

v(t) signal (0 to 6 ms)

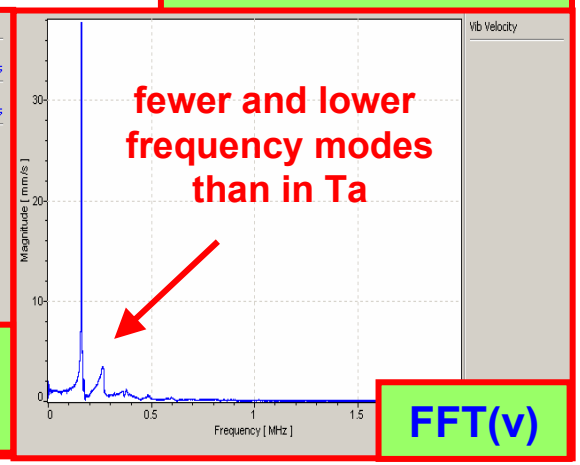

fewer and lower frequency modes than in Ta

FFT(v)

R. Wilfinger et al.

Target Material Examples

Peter Thieberger, BNL

Consider the case of a 16 TP , 3ns , 24 GeV proton pulses

Beam Induced Stress
Material Yield Strength

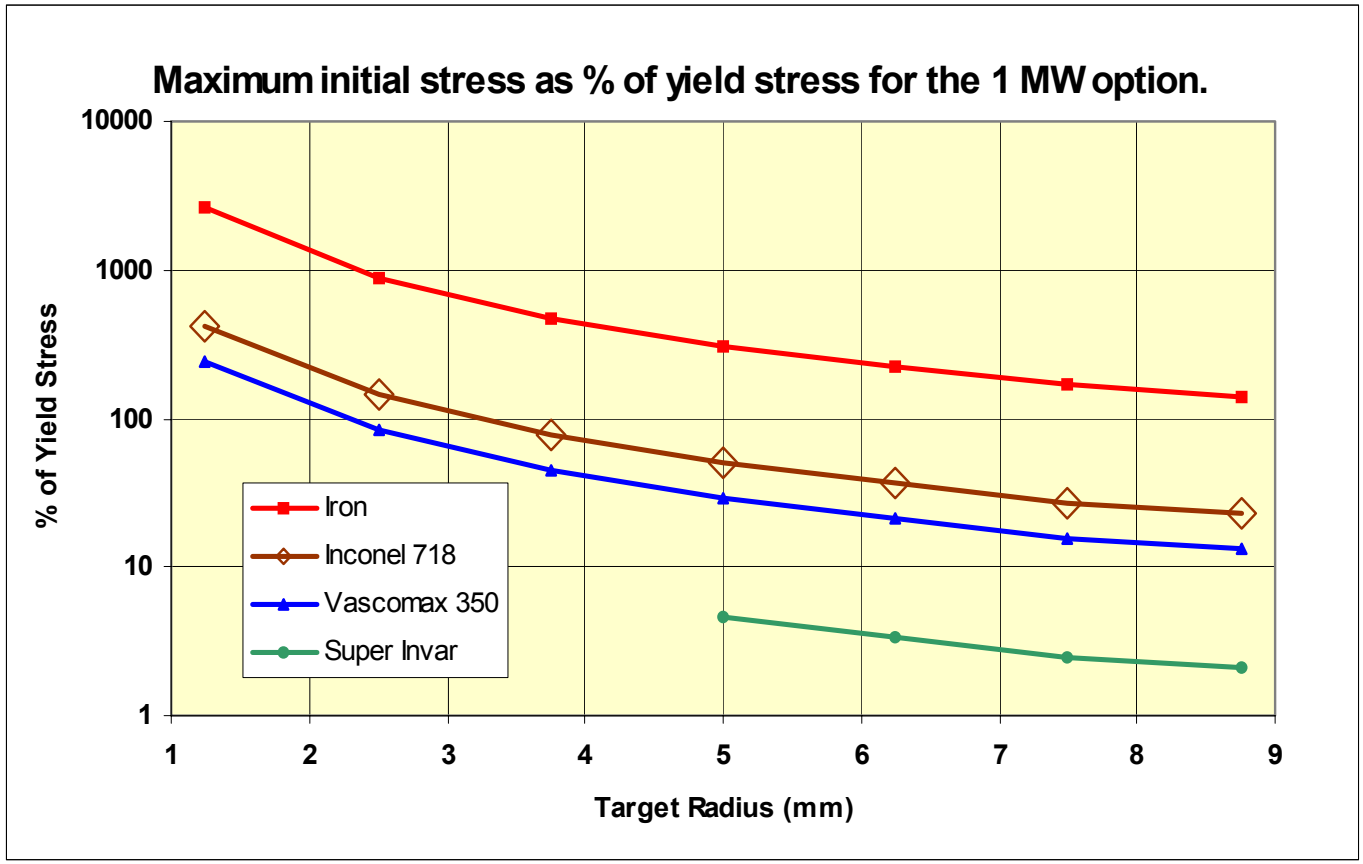

Harold G. Kirk

Super-invar Irradiation at BNL

The cylindrical samples of super-invar.

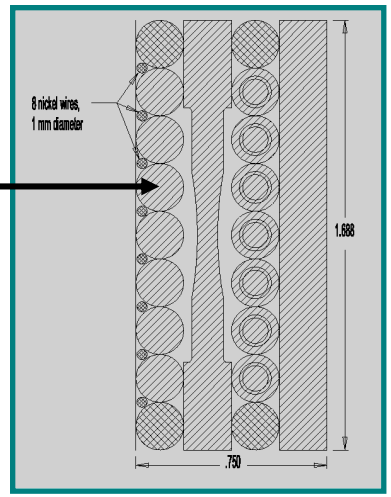

The target basket after irradiation

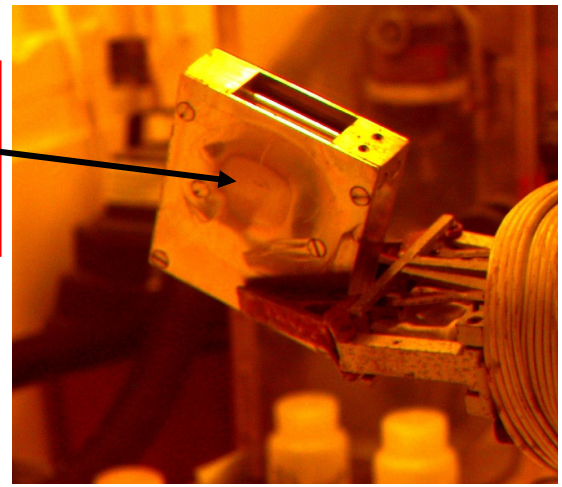

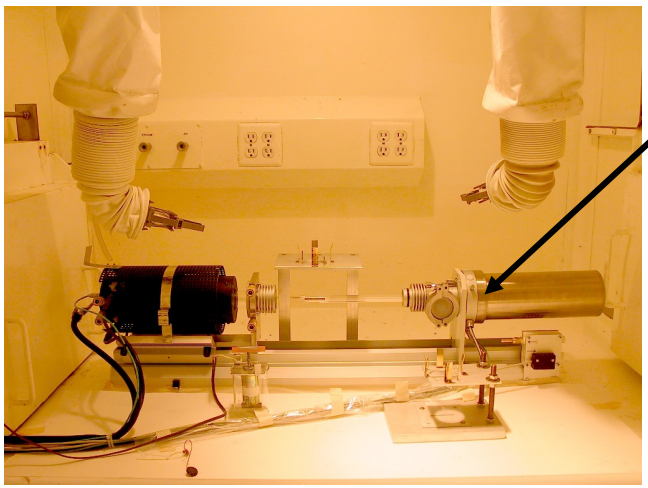

Dilatometer in Hot cell

Results of coefficient of thermal expansion measurements

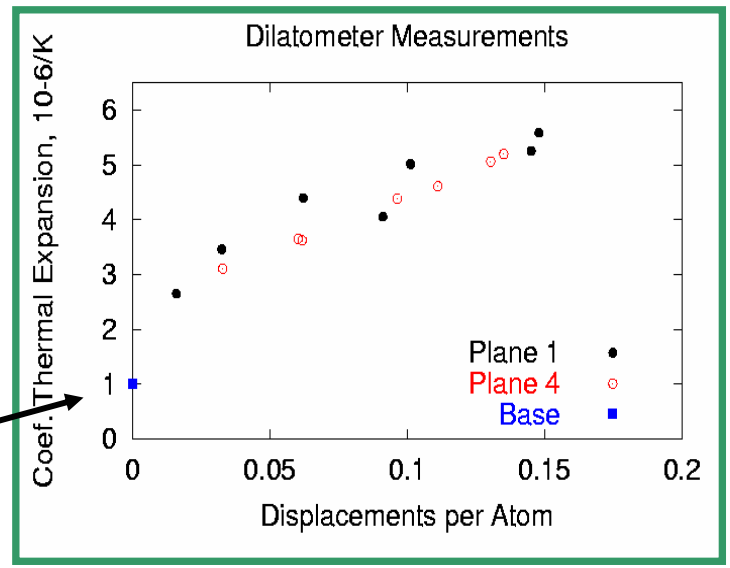

BROOKHAVEN NATIONAL LABORATORY

Harold G. Kirk

Achieving Intense Muon Beams

Maximize Pion/Muon Production

- Soft-pion Production
- High Z materials
- High Magnetic Field

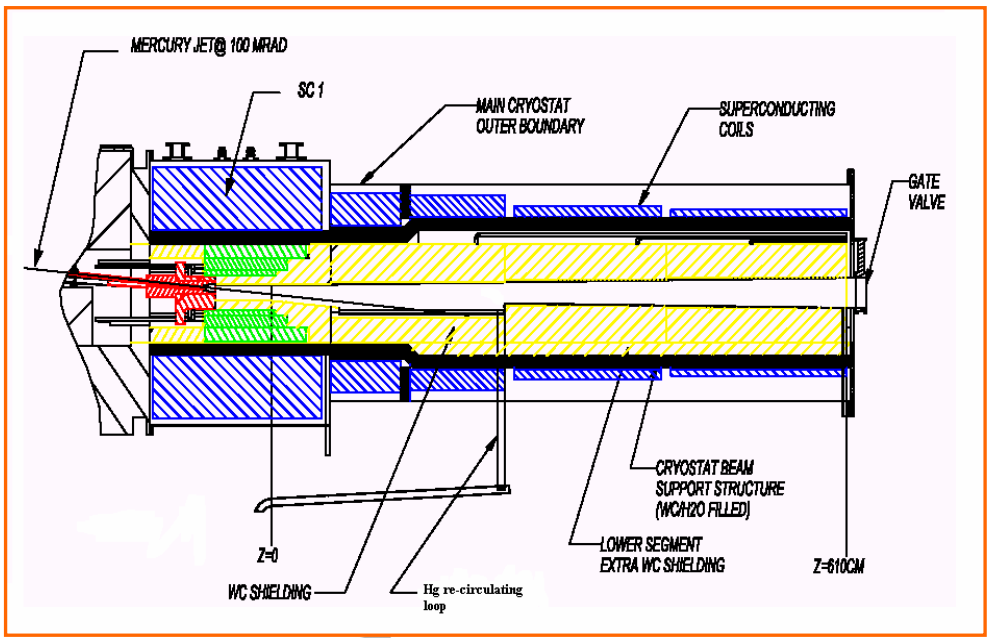

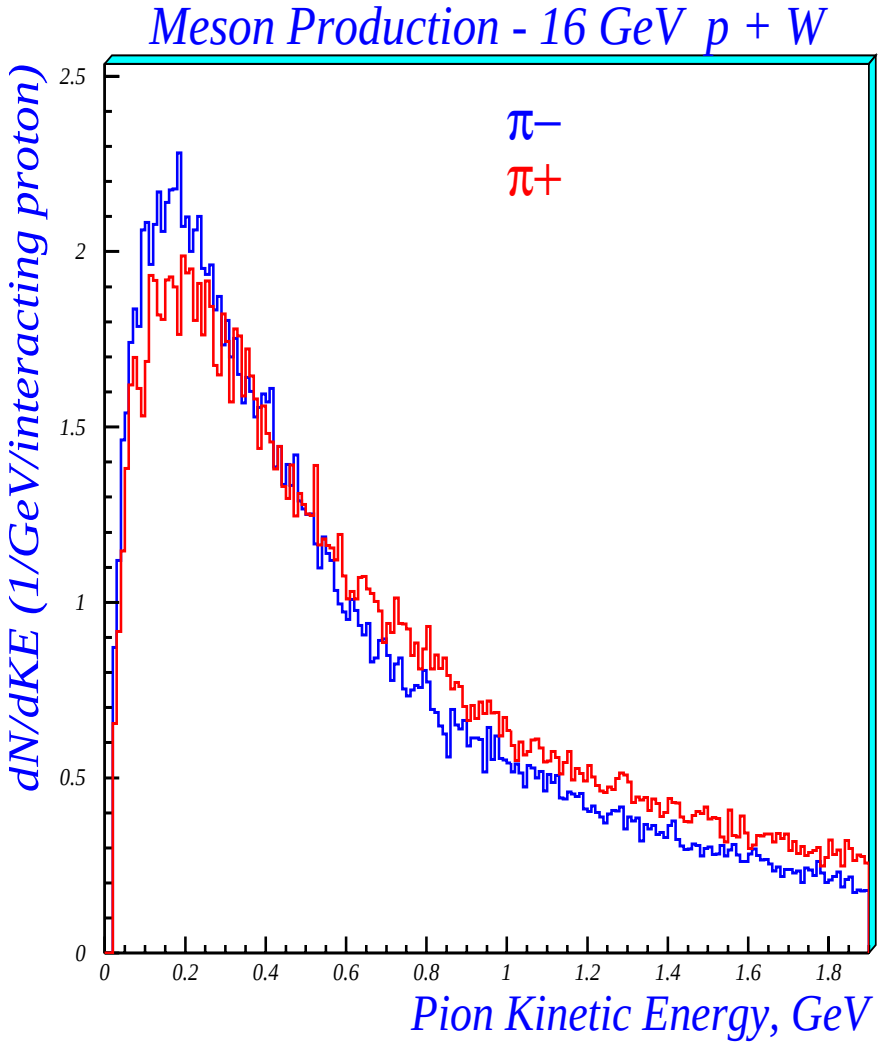

BROOKHAVEN NATIONAL LABORATORY

Harold G. Kirk

E951 Hg Jet Tests

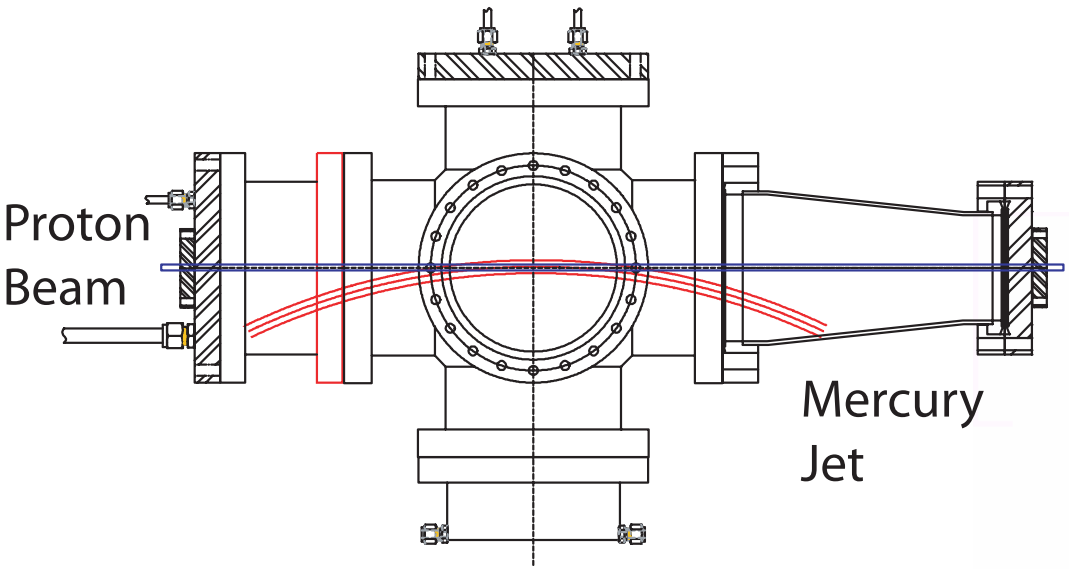

- 1cm diameter Hg Jet
- 24 GeV 4 TP Proton Beam
- No Magnetic Field

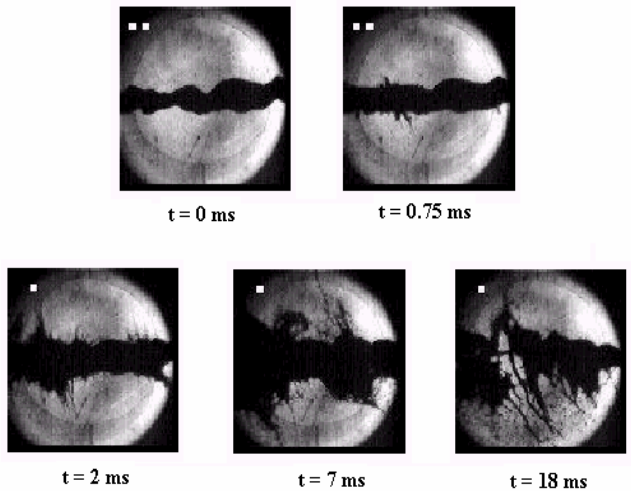

CERN/Grenoble Hg Jet Tests

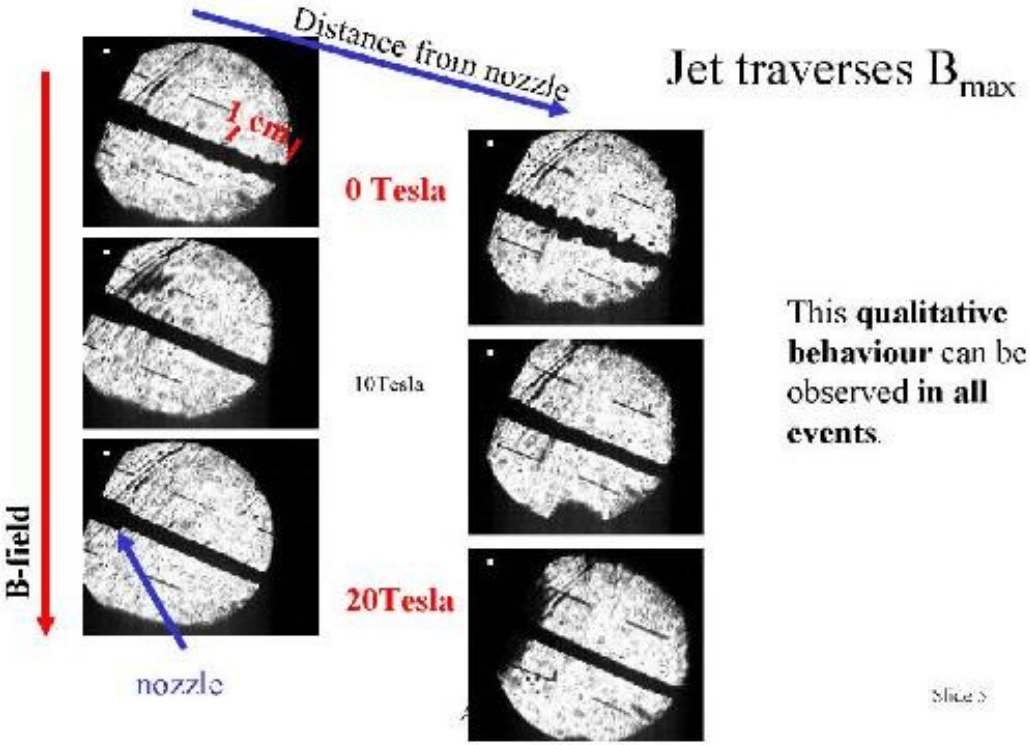

- **4 mm diameter Hg Jet**
- **v = 12 m/s**
- **0, 10, 20T Magnetic Field**
- **No Proton Beam**

A. Fabich, J. Lettry
Nufact'02

Key Initial Hg Jet Results

- Hg jet dispersal proportional to beam intensity (10 m/s for 4 TP 24 GeV beam)
- Hg jet dispersal velocities ~ ½ times that of "confined thimble" target
- Hg dispersal is largely transverse to the jet axis -- longitudinal propagation of pressure waves is suppressed
- Visible manifestation of jet dispersal delayed 40 μs
- The Hg jet is stabilized by the 20 T magnetic field

Bringing it all Together

We wish to perform a proof-of-principle test which will include:

- A high-power intense proton beam (16 to 32 TP per pulse)
- A high (> 15T) solenoidal field
- A high (> 10m/s) velocity Hg jet
- A ~1cm diameter Hg jet

Experimental goals include:

- Studies of 1cm diameter jet entering a 15T solenoid magnet
- Studies of the Hg jet dispersal provoked by an intense pulse of a proton beam in a high solenoidal field
- Studies of the influence of entry angle on jet performance
- Confirm Neutrino Factory/Muon Collider Targetry concept

Simulations at BNL (Samulyak)

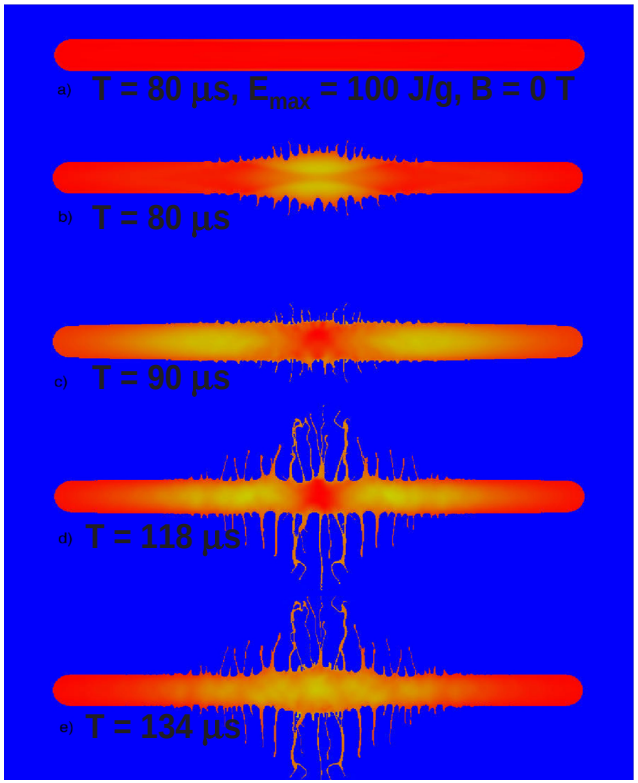

Gaussian energy deposition profile Peaked at 100 J/g. Times run from 0 to 124 μs.

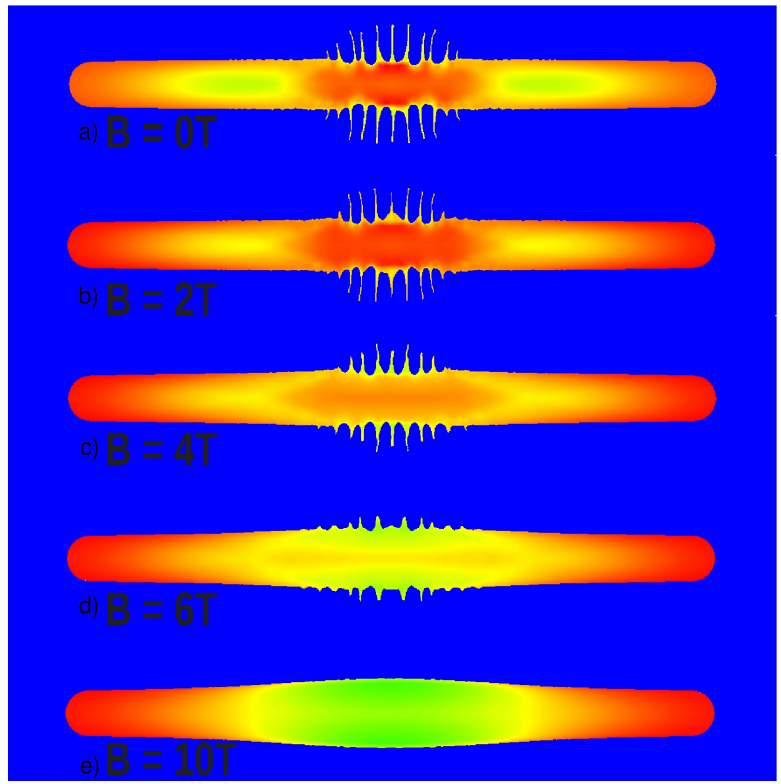

Jet dispersal at t=100 μs with magnetic Field varying from B=0 to 10T

Muon Collaboration

A High-power Target Test at CERN

CERN-INTC-2003-033
INTC-I-049
26 April 2004

A Proposal to
the ISOLDE and Neutron Time-of-Flight Experiments
Committee

Studies of a Target System for a 4-MW, 24-GeV Proton Beam

J. Roger J. Bennett[1], Luca Bruno[2], Chris J. Densham[1], Paul V. Drumm[1], T. Robert Edgecock[1], Tony A. Gabriel[3], John R. Haines[3], Helmut Haseroth[2], Yoshinari Hayato[4], Steven J. Kahn[5], Jacques Lettry[2], Changguo Lu[6], Hans Ludewig[5], Harold G. Kirk[5], Kirk T. McDonald[6], Robert B. Palmer[5], Yarema Prykarpatskyy[5], Nicholas Simos[5], Roman V. Samulyak[5], Peter H. Thieberger[5], Koji Yoshimura[4]

Spokespersons: H.G. Kirk, K.T. McDonald
Local Contact: H. Haseroth

Participating Institutions

1) RAL
2) CERN
3) KEK
4) BNL
5) ORNL
6) Princeton University

Proposal submitted April 26, 2004

BROOKHAVEN NATIONAL LABORATORY

Proposed Target Test Site at CERN

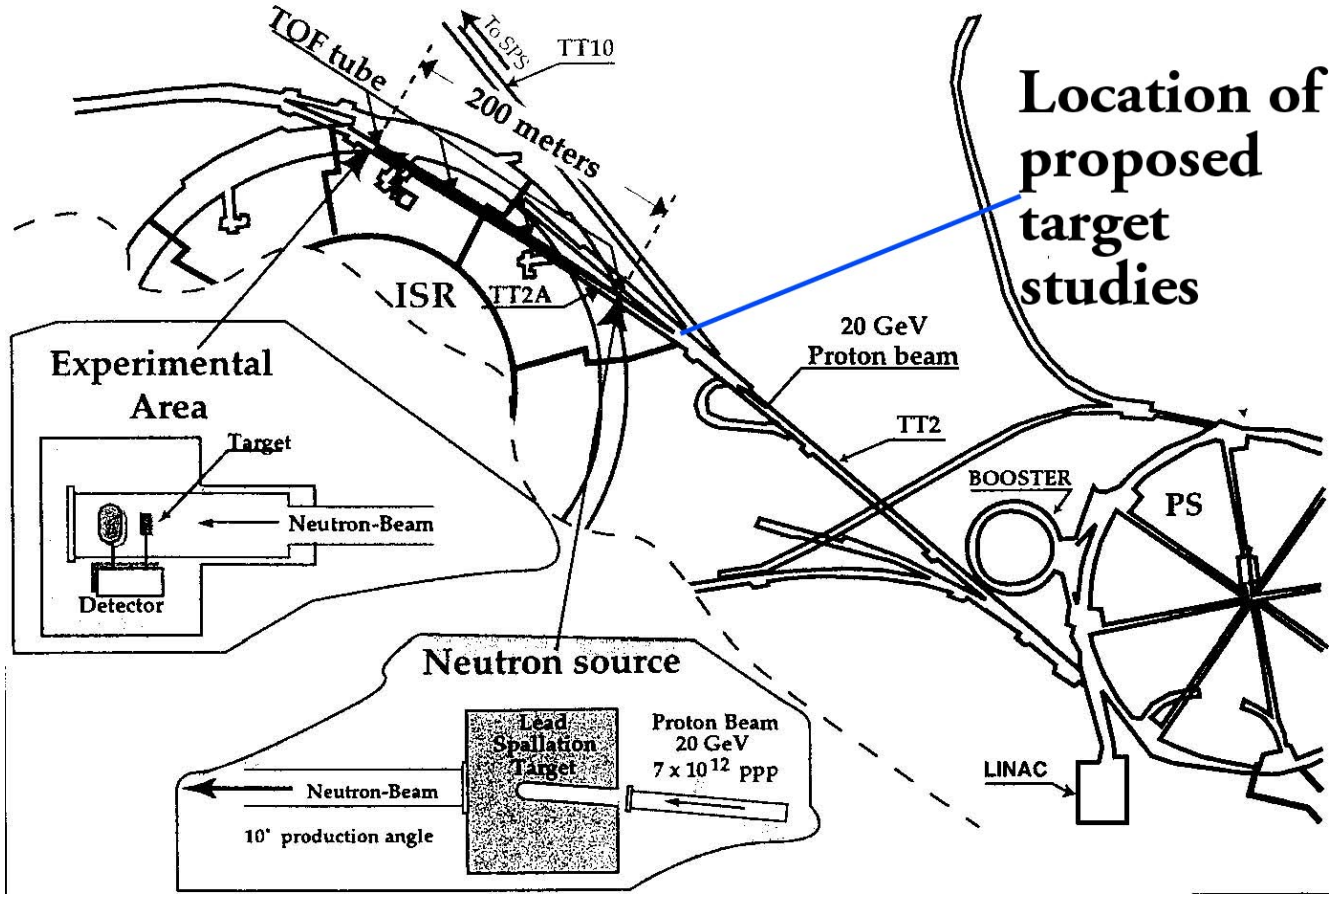

High Field Pulsed Solenoid

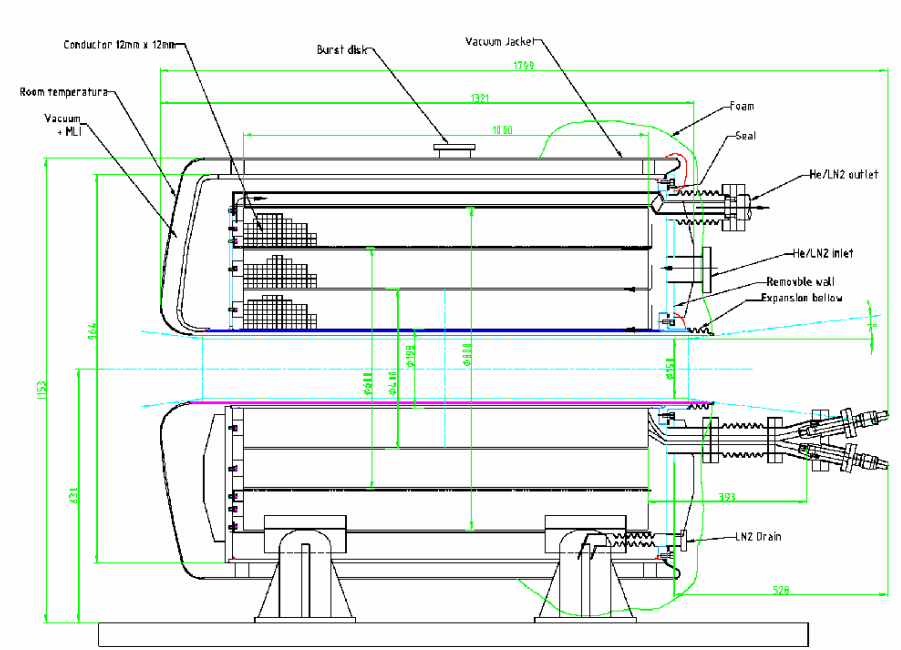

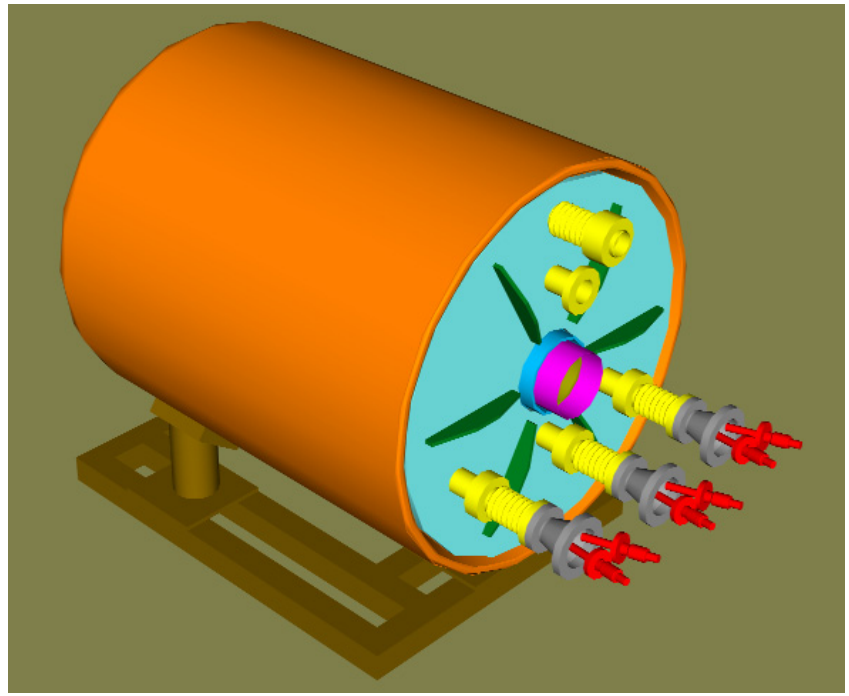

- 70° K Operation
- 15 T with 4.5 MW Pulsed Power
- 15 cm warm bore
- 1 m long beam pipe

Peter Titus, MIT

BROOKHAVEN NATIONAL LABORATORY

Harold G. Kirk

Layout of the Experiment

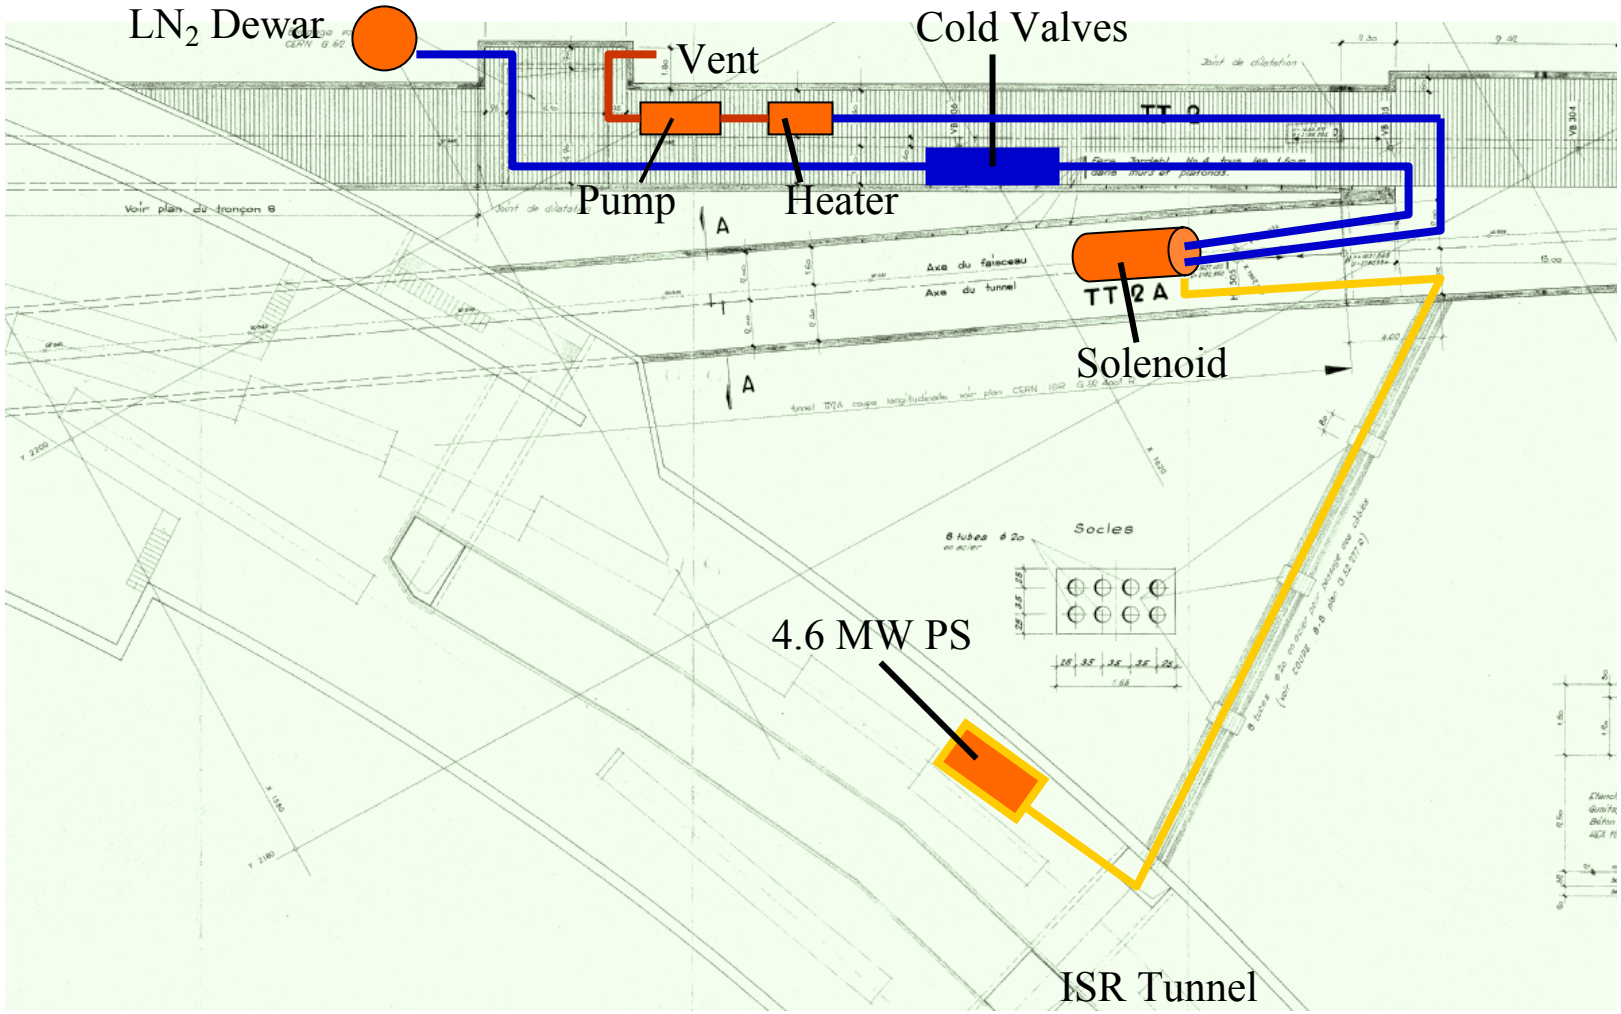

PS Extracted Beam Profile

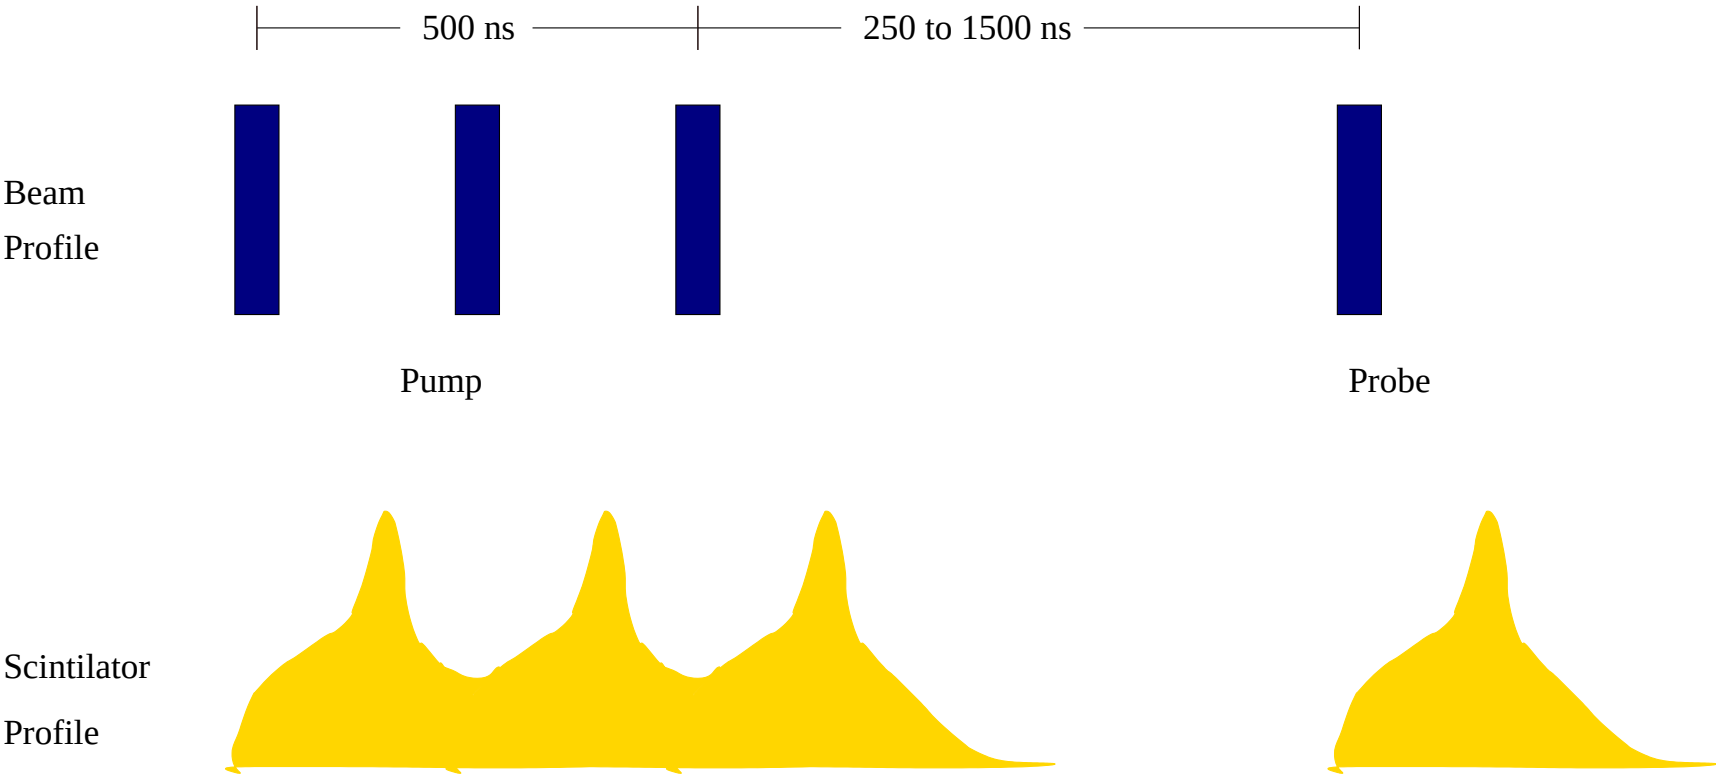

Conclusions

- New physics opportunities are establishing the case for the development of new high-power proton drivers.
- High-power targets are necessary for the exploitation of these new machines.
- Target systems have been developed for the initial 1MW class machines, but are as yet unproven.
- No convincing solution exists as yet for the envisioned 4 MW class machines.
- A world wide R&D effort is under way to develop new high-power targets and BNL is part of that effort.